Nominal data

Туре	3314 NH		
Nominal voltage		VDC	24
Nominal voltage range		VDC	18 28
Speed		min-1	3050
Power input		W	2.6
Min. ambient temperature		°C	-20
Max. ambient temperature		°C	75
Air flow		m ³ /h	93
Sound power level		В	5.1
Sound pressure level		dB(A)	38


ml = Max. load \cdot me = Max. efficiency \cdot fa = Running at free air \cdot cs = Customer specs \cdot cu = Customer unit Subject to alterations

DC axial fan

Technical features

Housing material	Fibreglass-reinforced plastic (PBT)
Impeller material	Fibreglass-reinforced plastic (PA)
Mass	0.19 kg
Dimensions	92 x 92 x 32 mm
Direction of air flow	Air exhaust over bars
Direction of rotation	Clockwise, looking at rotor
Type of protection	IP 40
Bearing	Ball bearing
Lifetime L10 at 40 °C	65000 h
Lifetime L10 at maximum	27500 h
temperature	
Connection line	With single strands AWG 24 UL 1061, TR 64

Product drawing

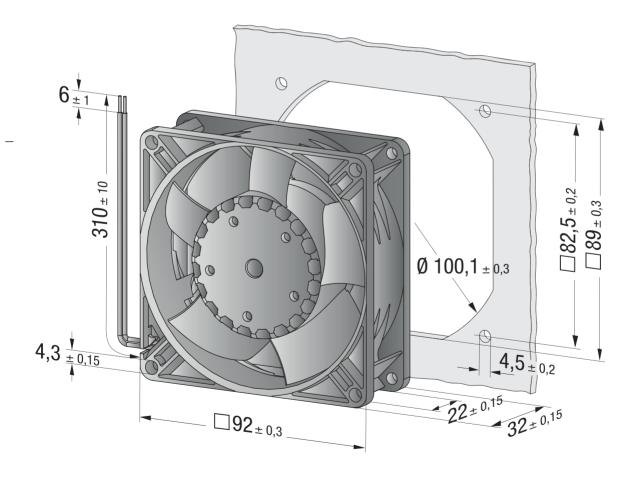

DC axial fan

Charts

