

Absolute encoders – multiturn

Motor-Line
electronic multiturn, optical

Sendix F5883M (hollow shaft)

SSI / BiSS



The optical Sendix F5883 multiturn encoder in the Motor-Line version stands out particularly because of its reduced overall depth of only 43 mm with a through hollow shaft up to 15 mm.

This opens up new possibilities when dimensioning the motors and for installation in tight mounting spaces. Its technical features make the F5883 Motor-Line the ideal device for use in geared motors.




24 bit MT
Multiturn resolution



Safety-Lock™



High rotational speed



Temperature range
-40°... +85°C



High protection level
IP




High shaft load capacity



Shock / vibration resistant



Magnetic field proof



Reverse polarity protection



Intelligent Scan Technology™



Surface protection salt spray-tested optional

Compact and robust

- Suitable for restricted mounting spaces thanks to its small construction depth of 43 mm and its tangential cable outlet.
- Sturdy bearing construction in Safety-Lock™ design for resistance against vibration and installation errors.
- Patented Intelligent Scan Technology™ with all singleturn and multiturn functions on one single OptoASIC - offering the highest reliability, a high resolution up to 41 bits and 100 % magnetic field insensitivity.

Versatile

- Through hollow shaft up to max. 15 mm and clamping both on the flange and on the cover side – suitable for usual drive shafts for geared motors, flexible installation.
- Available with SSI or BiSS interface and combined with SinCos incremental signals.
- SET button and LED for simple start-up.
- High resolution feedback in real-time via incremental outputs SinCos and RS422.
- Short control cycles, clock frequency with SSI up to 2 MHz / with BiSS up to 10 MHz.

Order code Hollow shaft ¹⁾

8.F5883M . XXXX . XXXX
Type a b c d e f g h

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces.
Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



a Flange

- 1 = with spring element, long, IP65
5 = with stator coupling, IP65, ø 63 mm [2.48"]
9 = with torque stop, flexible, IP65

b Hollow shaft

- Clamping on the flange side
3 = ø 10 mm [0.39"]
4 = ø 12 mm [0.47"]
5 = ø 14 mm [0.55"]
6 = ø 15 mm [0.59"]
9 = ø 1/2"

Clamping on the cover side

- A = ø 12 mm [0.39"]
B = ø 14 mm [0.55"]
C = ø 15 mm [0.59"]

c Interface / power supply

- 1 = SSI, BiSS / 5 V DC
2 = SSI, BiSS / 10 ... 30 V DC
3 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC
4 = SSI, BiSS + 2048 ppr. SinCos / 10 ... 30 V DC
5 = SSI, BiSS / 5 V DC, with sensor output
6 = SSI, BiSS + 2048 ppr. SinCos / 5 V DC, with sensor output
7 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 5 V DC
8 = SSI, BiSS + 2048 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC
A = SSI, BiSS + 1024 ppr. RS422 (TTL-comp.) / 5 V DC
B = SSI, BiSS + 1024 ppr. RS422 (TTL-comp.) / 10 ... 30 V DC

d Type of connection

- E = tangential cable, 1 m PVC**
F = tangential cable, special length PVC *)

*) Available special lengths (connection type F):
2, 3, 5, 8, 10, 15 m [5.56, 9.84, 16.40, 26.25, 32.80, 49.21"]
order code expansion .XXXX = length in dm
ex.: 8.F5883M.542F.G323.0030 (for cable length 3 m)

- e Code**
B = SSI, binary
C = BiSS, binary
G = SSI, gray

- f Resolution (singleturn) ²⁾**
A = 10 bit
1 = 11 bit
2 = 12 bit
3 = 13 bit
4 = 14 bit
7 = 17 bit

- g Resolution (multiturn) ²⁾**
2 = 12 bit MT
6 = 16 bit MT
4 = 24 bit MT

- h Options (service)**
1 = no option
2 = status LED
3 = SET button and status LED

Optional on request

- surface protection salt spray tested
- other singleturn resolutions

1) Series availability as from May 2016.

2) Resolution, preset value and counting direction factory-programmable.


Absolute encoders – multiturn

Motor-Line electronic multiturn, optical	Sendix F5883M (hollow shaft)	SSI / BiSS
--	-------------------------------------	-------------------

Mounting accessory for hollow shaft encoders	Order no.
---	------------------

Cylindrical pin, long with fixing thread **8.0010.4700.0000**

for torque stops



Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Suitable connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Mechanical characteristics		
Maximum speed hollow shaft version	9000 min ⁻¹ , 6000 min ⁻¹ (continuous)	
Starting torque at 20°C [68°F]	< 0.01 Nm	
Mass moment of inertia	6.0 x 10 ⁻⁶ kgm ²	
Load capacity of shaft	radial	80 N
	axial	40 N
Weight	approx. 0.45 kg [15.87 oz]	
Protection	IP65	
Working temperature range	-40°C ... +85°C [-40°F ... +185°F] ¹⁾	
Material	hollow shaft	stainless steel
	flange	aluminium
	housing	zinc die-cast
	cable	PVC
Shock resistance acc. to EN 60068-2-27	2500 m/s ² , 6 ms	
Vibration resistance acc. to EN 60068-2-6	100 m/s ² , 55 ... 2000 Hz	

Electrical characteristics		
Power supply	5 V DC (+5%) or 10 ... 30 V DC	
Current consumption (no load)	5 V DC	max. 60 mA
	10 ... 30 V DC	max. 30 mA
Reverse polarity protection of the power supply	yes (at 10 ... 30 V DC)	
Short circuit proof outputs	yes ²⁾	
UL approval	file 224618 (pending)	
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU	

SSI interface		
Output driver	RS485 transceiver type	
Permissible load / channel	max. +/- 30 mA	
Signal level	HIGH	typ 3.8 V
	LOW at I _{Load} = 20 mA	typ 1.3 V
Resolution singleturn	10 ... 17 bit	
Number of revolutions (multiturn)	max. 24 bit	
Code	binary or gray	
SSI clock rate	50 kHz ... 2 MHz	
Data refresh rate	ST resolution ≤ 14 bit	≤ 1 µs
	ST resolution ≥ 15 bit	4 µs
Monoflop time	≤ 15 µs	
Note: If the clock starts cycling within the monoflop time, a second data transfer starts with the same data. If the clock starts cycling after the monoflop time, the data transfer starts with the new values. The update rate is dependent on the clock speed, data length and monoflop-time.		

BiSS interface	
Resolution singleturn	10 ... 17 bit
Number of revolutions (multiturn)	max. 24 bit
Code	binary
BiSS clock rate	50 kHz ... 10 MHz
Max. update rate	< 10 μs, depends on the clock rate and the data length
Data refresh rate	≤ 1 μs
Note:	<ul style="list-style-type: none"> – bidirectional, factory programmable parameters are: resolution, code, direction, alarms and warnings – CRC data verification

Status output and LED	
Output driver	open collector, internal pull up resistor 22 kΩhm
Permissible load	max. 20 mA
Signal level	HIGH: +V / LOW: < 1 V
Active	LOW
The optional LED (red) and the status output serve to display various alarm or error messages. In normal operation the LED is OFF and the status output is HIGH (open collector with int. pull up 22 kΩhm).	
An active status output (LOW) displays: <ul style="list-style-type: none"> – sensor error, singleturn or multiturn (soiling, glass breakage etc.) – LED fault (failure or ageing) – over- or under-temperature 	
In the SSI mode, the fault indication can only be reset by switching off the power-supply to the device.	

Option incremental outputs (A/B), 1024 / 2048 ppr		
	SinCos	RS422 TTL-compatible
Max. frequency -3dB	400 kHz	400 kHz
Signal level	1 V _{pp} (±20 %)	HIGH: min. 2.5 V LOW: max. 0.5 V
Short circuit proof	yes ²⁾	yes ²⁾

1) Temperature measured on the flange – max. 80°C allowable on the cable (fixed installation).
2) Short circuit to 0 V or to output; if power supply correctly applied.

Absolute encoders – multiturn

Motor-Line electronic multiturn, optical	Sendix F5883M (hollow shaft)	SSI / BiSS
--	-------------------------------------	-------------------

SET input		
Input		active HIGH
Input type		comparator
Signal level (+V = power supply)	HIGH LOW	min. 60 % of +V, max: +V max. 30 % of +V
Input current		< 0.5 mA
Min. pulse duration (SET)		10 ms
Input Delay		1 ms
New position data readable after		1 ms
Internal processing time		200 ms

The encoder can be set to zero at any position by means of a HIGH signal on the SET input or by pressing the optional SET button (with a pencil, ball-point pen or similar). Other preset values can be factory-programmed. The SET input has a signal processing time of approx. 1 ms, after which the new position data can be read via SSI or BiSS. Once the SET function has been triggered, the encoder requires an internal processing time of typ. 200 ms; during this time the power supply must not be switched off.

The SET function should be carried out whilst the encoder is at rest.

If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.

DIR input	
<p>Direction input: A HIGH signal switches the direction of rotation from the default cw to ccw. This inverted function can also be factory-programmed. If DIR is changed when the device is already switched on, then this will be interpreted as an error. The status output will switch to LOW.</p> <p>If this input is not used, it should be connected to 0 V (Encoder ground GND) in order to avoid interferences.</p>	
Response time (DIR input)	1 ms

Power-ON Time	
<p>After Power-ON the device requires a time of approx. 150 ms before valid data can be read.</p> <p>Hot plugging of the encoder should be avoided.</p>	

Terminal assignment

Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
1, 2	E, F	SET, DIR, Status	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	Stat	N/C	N/C	N/C	⊥
			Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	BK	-	-	-	shield
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
5	E, F	SET, DIR, Status sensor output	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	Stat	N/C	0Vsens	+Vsens	⊥
			Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	BK	-	GY-PK	RD-BU	shield
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
3, 4, 7, 8, A, B	E F	SET, DIR, SinCos or incr. RS422	Signal:	0 V	+V	C+	C-	D+	D-	SET	DIR	A	\bar{A}	B	\bar{B}	⊥
			Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY-PK	RD-BU	shield
Interface	Type of connection	Features	Cable (isolate unused wires individually before initial start-up)													
6	E, F	SinCos or incr. RS422 sensor output	Signal:	0 V	+V	C+	C-	D+	D-	A	\bar{A}	B	\bar{B}	0Vsens	+Vsens	⊥
			Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	BK	VT	GY-PK	RD-BU	shield

+V:	Encoder power supply +V DC
0 V:	Encoder power supply ground GND (0 V)
0 Vsens / +Vsens:	Using the sensor outputs of the encoder, the voltage present can be measured and if necessary increased accordingly.
C+, C-:	Clock signal
D+, D-:	Data signal
A, \bar{A} :	Incremental output channel A (cosine)
B, \bar{B} :	Incremental output channel B (sine)
SET:	Set input
DIR:	Direction input
Stat:	Status output
PH ⊥:	Plug connector housing (shield)

Motor-Line electronic multiturn, optical

Sendix F5883M (hollow shaft)


SSI / BiSS

Dimensions hollow shaft version

Dimensions in mm [inch]

Flange with spring element, long Flange type 1

- 1 Torque stop slot,
recommendation:
cylindrical pin DIN 7, $\varnothing 4$ [0.16]
- 2 M3, 5.5 [0.21] deep
- 3 Recommended torque for the
clamping ring 0.6 Nm
- 4 Status-LED
- 5 SET button

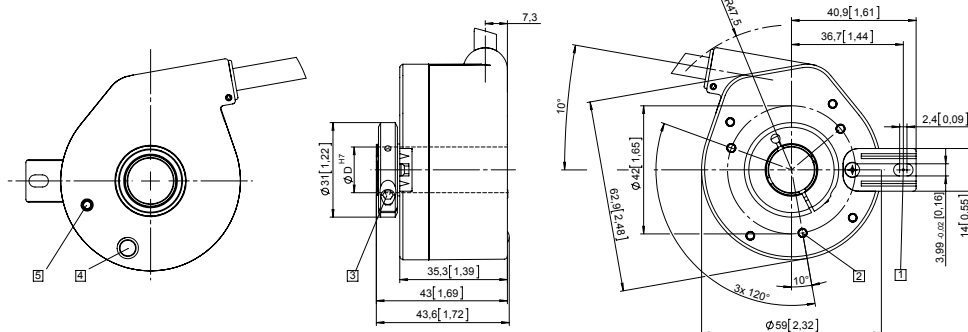


Flange with stator coupling, ø 63 [2.48]

Flange type 5

Pitch circle diameter for fixing screws 63 mm [2.48]

- 1 Recommended torque for the clamping ring 0.6 Nm
- 2 Status-LED
- 3 SET button

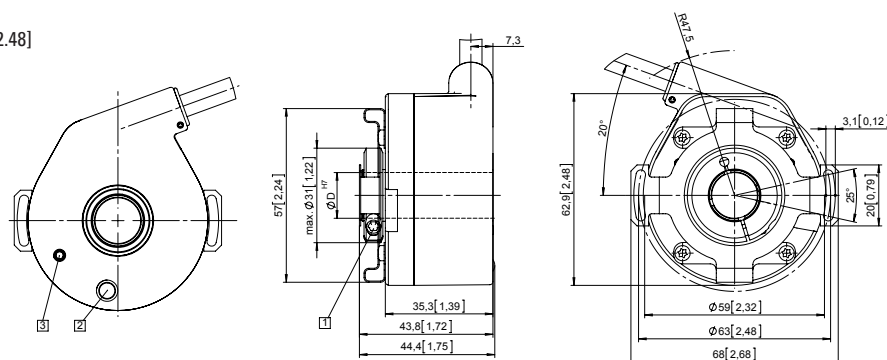

Flange with torque stop, flexible

Flange type 9

- 1 Recommended torque for the clamping ring 0.6 Nm
- 2 Status-LED
- 3 SET button

