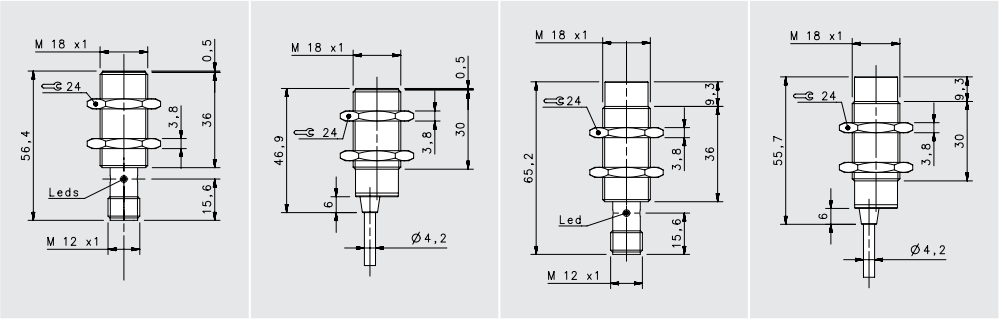


## SHORT X2

| FLUSH | | NON FLUSH | |
|---|---|---|---|
| M12 conn | cable | M12 conn | cable |
| **8 mm** | **8 mm** | **14 mm** | **14 mm** |
| IS-18-G0-S2 | IS-18-G0-03 | IS-18-H0-S2 | IS-18-H0-03 |
| 95B064270 | 95B063851 | 95B064290 | 95B064250 |
| IS-18-G1-S2 | IS-18-G1-03 | IS-18-H1-S2 | IS-18-H1-03 |
| 95B063531 | 95B063521 | 95B063611 | 95B063601 |
| IS-18-G2-S2 | IS-18-G2-03 | IS-18-H2-S2 | IS-18-H2-03 |
| 95B063551 | 95B063541 | 95B063631 | 95B063621 |
| IS-18-G3-S2 | IS-18-G3-03 | IS-18-H3-S2 | IS-18-H3-03 |
| 95B063491 | 95B063061 | 95B063571 | 95B063561 |
| IS-18-G4-S2 | IS-18-G4-03 | IS-18-H4-S2 | IS-18-H4-03 |
| 95B063511 | 95B063501 | 95B063591 | 95B063581 |
| IS-18-G5-S2 | IS-18-G5-03 | IS-18-H5-S2 | IS-18-H5-03 |
| 95B062731 | 95B062721 | 95B062811 | 95B064220 |
| IS-18-G6-S2 | IS-18-G6-03 | IS-18-H6-S2 | IS-18-H6-03 |
| 95B062711 | 95B064200 | 95B062791 | 95B064210 |
| IS-18-G9-S2 | IS-18-G9-03 | IS-18-H9-S2 | IS-18-H9-03 |
| 95B064330 | 95B063811 | 95B064350 | 95B064320 |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| --- | --- | --- | --- |
| 10-30 Vdc (-15/10%) | 10-30 Vdc (-15/10%) | 10-30 Vdc (-15/10%) | 10-30 Vdc (-15/10%) |
| < 10% | < 10% | < 10% | < 10% |
| < 10% | < 10% | < 10% | < 10% |
| 200 mA | 200 mA | 200 mA | 200 mA |
| > 1,6 mA (2wires ver.) | > 1,6 mA (2wires ver.) | > 1,6 mA (2wires ver.) | > 1,6 mA (2wires ver.) |
| < 10 mA | < 10 mA | < 10 mA | < 10 mA |
| < 1,2 V (I=100mA) | < 1,2 V (I=100mA) | < 1,2 V (I=100mA) | < 1,2 V (I=100mA) |
| Yellow | Yellow | Yellow | Yellow |
| 400 Hz | 400 Hz | 400 Hz | 400 Hz |
| < 75 ms | < 75 ms | < 75 ms | < 75 ms |
| < 3% | < 3% | < 3% | < 3% |
| Present (self-resetting) | Present (self-resetting) | Present (self-resetting) | Present (self-resetting) |
| Against polarity reversal inductive loads | Against polarity reversal inductive loads | Against polarity reversal inductive loads | Against polarity reversal inductive loads |
| (-25 ... +60 °C) | (-25 ... +70 °C) | (-25 ... +60 °C) | (-25 ... +70 °C) |
| IP67 | IP67 | IP67 | IP67 |
| --- | 2 m | --- | 2 m |
| --- | 3 x 0,25 mm² | --- | 3 x 0,25 mm² |
| Nickel-plated brass | Nickel-plated brass | Nickel-plated brass | Nickel-plated brass |
| --- | 145g | --- | 145g |
| 95g | --- | 95g | --- |