fischer elektronik

Extruded heatsinks for PCB mounting

for semiconductor screw-mounting

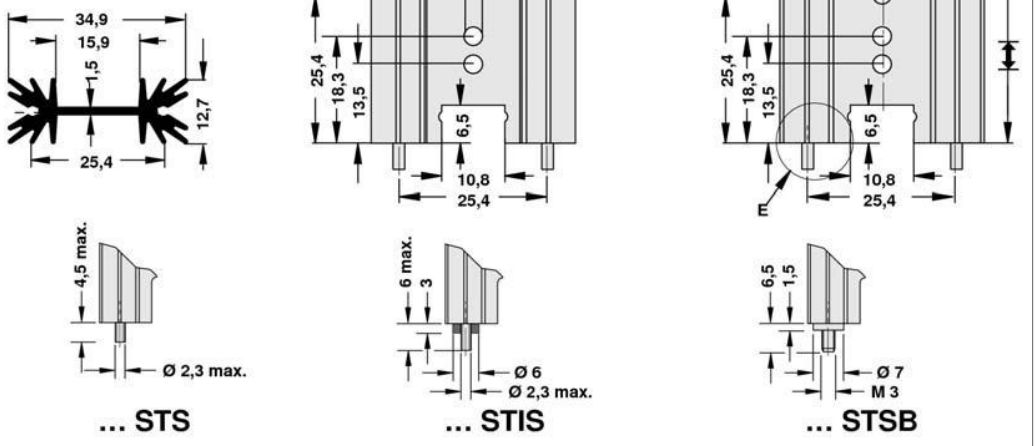

art. no.	↔ [mm]	R_{th} [K/W]	⌖
SK 104 25,4 ...	25.4	14	TO 220/ SOT 32/ TO 3 P
SK 104 38,1 ...	38.1	11	TO 220/ SOT 32/ TO 3 P
SK 104 50,8 ...	50.8	9	TO 220/ SOT 32/ TO 3 P
SK 104 63,5 ...	63.5	8	TO 220/ SOT 32/ TO 3 P

please indicate: **... mouting method**
STS =with solder pin
STIS =with solder pins and insulating washer
STSB=with threaded bolt M 3, brass

E = mounting method

special lengths and transistor drillings on request
surface treatment: black anodised

horizontal for semiconductor screw-mounting

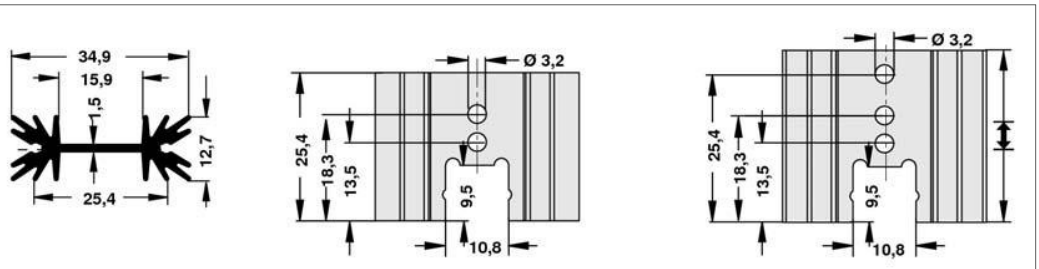

art. no.	↔ [mm]	R_{th} [K/W]	⌖
SK 104 25,4 LS	25.4	14	TO 220/ SOT 32/ TO 3 P
SK 104 38,1 LS	38.1	11	TO 220/ SOT 32/ TO 3 P
SK 104 50,8 LS	50.8	9	TO 220/ SOT 32/ TO 3 P

special lengths and transistor drillings on request
surface treatment: black anodised

Heatsinks with threaded rail → **A 92**
Profiles for PCB components → **A 91**
Retaining springs for transistors → **A 114 – 119**
Order example → **A 21**
Attachable heatsinks for TO-cases → **A 93**
Mounting for TO 3 angle → **A 123**
Silicone wafers → **E 2 – 4**
Mica wafers → **E 11**