

FOOT-OPERATED SWITCH MOULDED-PLASTIC
ENCLOSURE PEDAL PUSHBUTTON,
ONE PEDAL WITHOUT COVER, 1 CO

General technical details:

Product designation		momentary-contact foot switch
Product equipment / interlock		No
Product equipment / notch		No
Product component / covering		No
Operating current / at AC-15 / at 230 V / rated value	A	5
Number of switching steps		1
Nature of command		on or off
Reference code / according to DIN 40719 extended according to IEC 204-2 / according to IEC 750		S
Reference code / according to DIN EN 61346-2		S
Mounting type		screw fixing
Width	mm	71
Height	mm	96
Depth	mm	27

Enclosure:

Material / of the enclosure		plastic with total insulation
Color		black
Color / of the housing		black
Color / of top part of the enclosure		black
Cable gland version		cable, 3 m

Drive Head:

Number of the activation pedals		1
---------------------------------	--	---

Contact:

Number of NC contacts / for auxiliary contacts		0
Number of NO contacts / for auxiliary contacts		0
Number of changeover contacts / for auxiliary contacts		1

Ambient conditions:

Protection class IP		IP65
Ambient temperature		

- during operating

°C

75 ... -10

Certificates/approvals:

Suitability for use / safety cut-out switch

No

Certificates/approvals:

General Product Approval

Declaration of Conformity



CSA



EG-Konf.

Shipping Approval

other



ABS



LRS





PRS



RINA

[Confirmation](#)

[other](#)

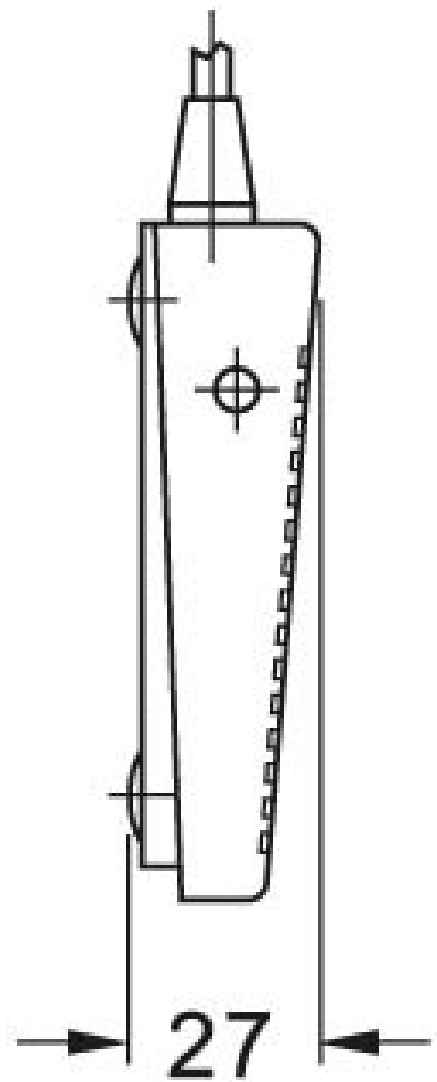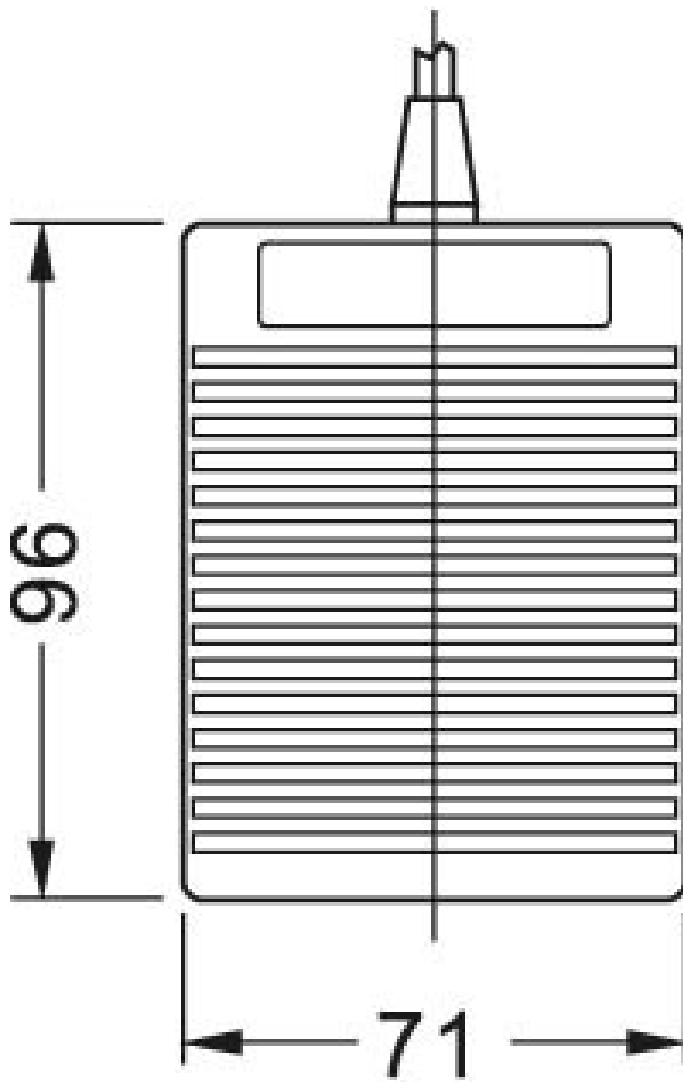

NSC00426

last change:

Jan 21, 2013