Wyświetlacz LCD 4*20 -2004B-YLY Y/G żółte tło, zielone litery

LCD-AC-2004B-YLY Y/G-E12 PBF

Wyświetlacz 4x20 z podświetlaniem LED (yellow-green)

prąd podświetlenia (backlight) I= 160mA (U=5V)

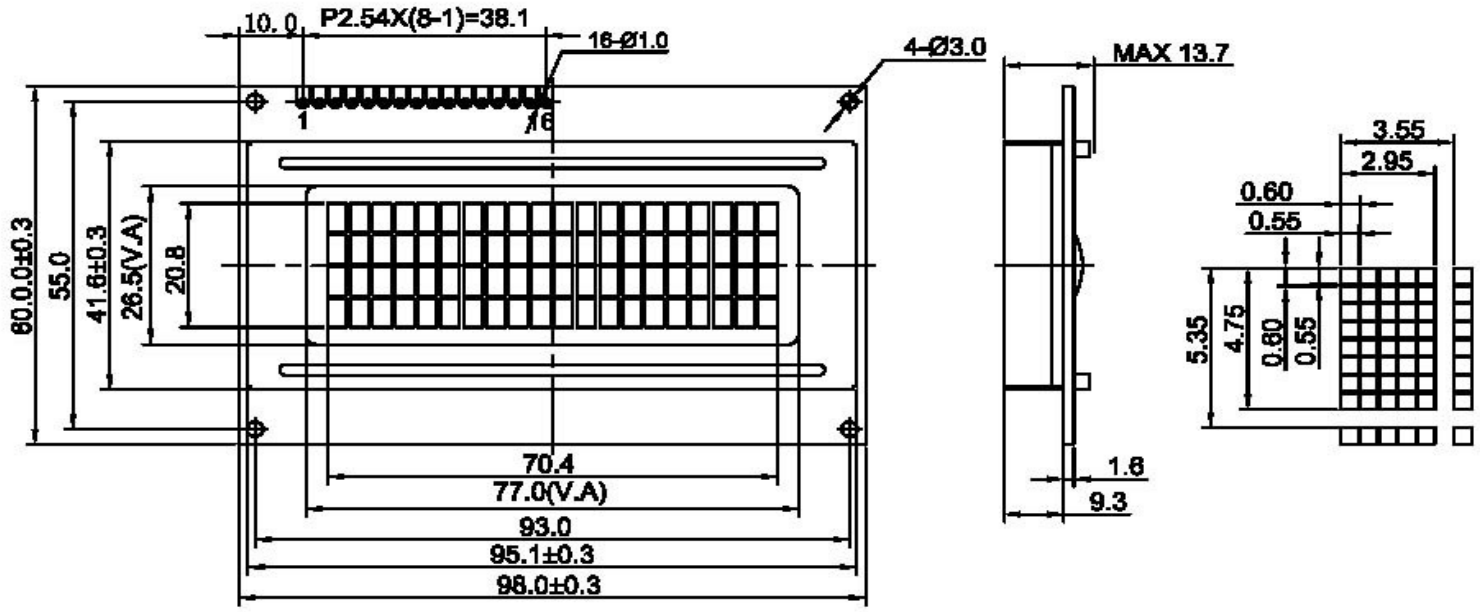

Pin No	Symbol	Level	Description
1	VSS	–	GND
2	VDD	–	Power supply for Logic(+5.0V)
3	Vo	–	Power supply for LCD
4	RS	H/L	Register selection (H:Data registor, L:Instruction registor)
5	R/W	H/L	Read/write selection (H:Read,L:Write)
6	E	H/H—L	Enable signal for chip
7-14	DB0-DB7	H/L	Data Bus line
15	LEDA	–	Power supply for Blacklight(+)
16	LEDK	–	Power supply for Blacklight(-)