

Absolute encoders - singleturn

Standard
optical

Sendix 5858 / 5878 (shaft / hollow shaft)

PROFINET IO



The singleturn encoders 5858 and 5878 with PROFINET interface and optical sensor technology are ideal for use in all applications with a PROFINET interface.

The encoder supports the IRT mode and is therefore ideal for real-time applications.



Absolute encoders
singleturn



Reliable

- Ideally suited for all PROFINET applications thanks to the use of encoder profile 4.1.
- Perfect for use in harsh outdoor environments, as a result of IP67 protection and rugged housing construction.

Flexible

- IRT-Mode.
- Cycle time ≤ 1 ms.
- Firmware updater allows for easy expansion of characteristics without having to disassemble the encoder.
- M12 connector ensures fast, simple, error-free connection.

Order code Shaft version

8.5858 . X X C 2 . C2 12
Type a b c d e

a Flange

- 1 = clamping flange, IP65 $\varnothing 58$ mm [2.28"]
3 = clamping flange, IP67 $\varnothing 58$ mm [2.28"]
2 = synchro flange, IP65 $\varnothing 58$ mm [2.28"]
4 = synchro flange, IP67 $\varnothing 58$ mm [2.28"]
5 = square flange, IP65 $\square 63.5$ mm [2.5"]
7 = square flange, IP67 $\square 63.5$ mm [2.5"]

b Shaft ($\varnothing \times L$), with flat

- 1 = 6×10 mm [0.24 x 0.39"]¹⁾
2 = 10×20 mm [0.39 x 0.79"]²⁾
3 = $1/4" \times 7/8"$
4 = $3/8" \times 7/8"$

c Interface / power supply

C = PROFINET IO / 10 ... 30 V DC

d Type of connection

removable bus terminal cover
2 = 3 x M12 connector

e Field bus profile

C2 = PROFINET IO

Optional on request
- Ex 2/22
- surface protection salt spray tested

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



Order code Hollow shaft

8.5878 . X X C 2 . C2 12
Type a b c d e

a Flange

- 1 = with spring element, long, IP65
2 = with spring element, long, IP67
3 = with stator coupling, IP65 $\varnothing 65$ mm [2.56"]
4 = with stator coupling, IP67 $\varnothing 65$ mm [2.56"]
5 = with stator coupling, IP65 $\varnothing 63$ mm [2.48"]
6 = with stator coupling, IP67 $\varnothing 63$ mm [2.48"]

b Blind hollow shaft

- 3 = $\varnothing 10$ mm [0.39"]
4 = $\varnothing 12$ mm [0.47"]
5 = $\varnothing 14$ mm [0.55"]
6 = $\varnothing 15$ mm [0.59"]
8 = $\varnothing 3/8"$
9 = $\varnothing 1/2"$

c Interface / power supply

C = PROFINET IO / 10 ... 30 V DC

d Type of connection

removable bus terminal cover
2 = 3 x M12 connector

e Field bus profile

C2 = PROFINET IO

Optional on request
- Ex 2/22
- surface protection salt spray tested

If for each parameter of an encoder the underlined preferred option is selected, then the delivery time will be 10 working days for a maximum of 10 pieces. Qts. up to 50 pcs. of these types generally have a delivery time of 15 working days.



1) Preferred type only in conjunction with flange type 2.
2) Preferred type only in conjunction with flange type 1.

Absolute encoders - singleturn

Standard optical	Sendix 5858 / 5878 (shaft / hollow shaft)	PROFINET IO
-------------------------	--	--------------------


Mounting accessory for shaft encoders

Coupling	bellows coupling ø 19 mm [0.75"] for shaft 6 mm [0.24"]	8.0000.1102.0606
	bellows coupling ø 19 mm [0.75"] for shaft 10 mm [0.39"]	8.0000.1102.1010

Mounting accessory for hollow shaft encoders

Cylindrical pin, long	with fixing thread	8.0010.4700.0000
------------------------------	--------------------	-------------------------

for torque stops



Connection technology

Connector, self-assembly (straight)	coupling M12 for port 1 and port 2 connector M12 for power supply	05.WASCSY4S 05.B8141-0
--	--	---

Cordset, pre-assembled	M12 for port 1 and port 2, 2 m [6.56'] PUR cable M12 for power supply, 2 m [6.56'] PUR cable	05.00.6031.4411.002M 05.00.6061.6211.002M
-------------------------------	---	--

Further accessories can be found in the accessories section or in the accessories area of our website at: www.kuebler.com/accessories.
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: www.kuebler.com/connection_technology.

Technical data

Mechanical characteristics		
Maximum speed		
IP65 up to 70°C [158°F]	9000 min ⁻¹ , 7000 min ⁻¹ (continuous)	
IP65 up to T _{max}	7000 min ⁻¹ , 4000 min ⁻¹ (continuous)	
IP67 up to 70°C [158°F]	8000 min ⁻¹ , 6000 min ⁻¹ (continuous)	
IP67 up to T _{max}	6000 min ⁻¹ , 3000 min ⁻¹ (continuous)	
Starting torque - at 20°C [68°F]		
IP65	< 0.01 Nm	
IP67	< 0.05 Nm	
Mass moment of inertia		
shaft version	3.0 x 10 ⁻⁶ kgm ²	
hollow shaft version	6.0 x 10 ⁻⁶ kgm ²	
Load capacity of shaft		
radial	80 N	
axial	40 N	
Weight		approx. 0.50 kg [17.64 oz]
Protection acc. to EN 60529		
housing side	IP67	
shaft side	IP65, opt. IP67	
Working temperature range		-40°C ... +85°C [-40°F ... +185°F]
Material		
shaft/hollow shaft	stainless steel	
flange	aluminium	
housing	zinc die-cast	
Shock resistance acc. to EN 60068-2-27		2500 m/s ² , 6 ms
Vibration resistance acc. to EN 60068-2-6		100 m/s ² , 55 ... 2000 Hz

Electrical characteristics	
Power supply	10 ... 30 V DC
Power consumption (no load)	max. 200 mA
Reverse polarity protection of the power supply	yes
UL approval	file 224618
CE compliant acc. to	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU

Interface characteristics PROFINET IO	
Resolution	1 ... 65535 (16 bit), scaleable default: 8192 (13 bit)
Code	binary
Protocol	PROFINET IO

Link 1 and 2, LED (green / yellow)		
Two colored	green	active link
	yellow	data transfer

Error LED (red) / PWR LED (green)	
Functionality see manual	

Absolute encoders - singleturn

Standard optical

Sendix 5858 / 5878 (shaft / hollow shaft)

PROFINET IO

General information about PROFINET IO

The PROFINET encoder implements the encoder profile 4.1. (according to the specification Encoder Version 4.1 Dec 2008")

It permits scaling and preset values, as well as many other additional parameters to be programmed via the PROFINET bus.

When switching on, all parameters are loaded from an EEPROM, where they were saved previously to protect them against power-failure, or taken over by the controller in the start-up phase.

Position, speed and many other states of the encoder can be transmitted.




PROFINET IO


The complete encoder profile according to profile encoder version 4.1 as well as the identification & maintenance functionality version 1.16 has been implemented. IM blocks 0, 1, 2, 3 and 4 are supported.

The **M**edia **R**edundancy **P**rotokoll is implemented here.

Basically, the advantage of MRP is that the functionality of the components, which are wired in a ring structure, is maintained in case of a failure or of a breakage of the wires in any location.

Terminal assignment bus

Interface	Type of connection	Function	M12 connector					
C	2 (3 x M12 connector)	Bus port 1	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -	 D coded
			Abbreviation:	TxD+	RxD+	TxD-	RxD-	
			Pin:	1	2	3	4	
		Power supply	Signal:	Voltage +	—	Voltage —	—	 D coded
			Abbreviation:	+ V	—	0 V	—	
			Pin:	1	2	3	4	
		Bus port 2	Signal:	Transmit data+	Receive data+	Transmit data -	Receive data -	 D coded
			Abbreviation:	TxD+	RxD+	TxD-	RxD-	
			Pin:	1	2	3	4	

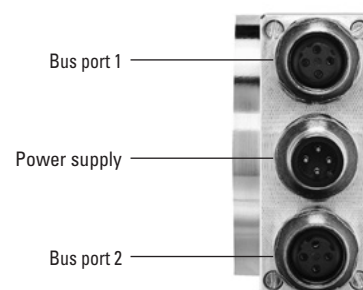

Absolute encoders - singleturn

Standard optical	Sendix 5858 / 5878 (shaft / hollow shaft)	PROFINET IO
------------------	---	-------------

Dimensions shaft version, with removable bus terminal cover



Dimensions in mm [inch]

Clamping flange, ø 58 [2.28]

Flange type 1 and 3

- 1 3 x M3, 6 [0.24] deep
- 2 3 x M4, 8 [0.32] deep

D	L	Fit
6 [0.24]	10 [0.39]	h7
10 [0.39]	20 [0.79]	f7
1/4"	7/8"	h7
3/8"	7/8"	h7

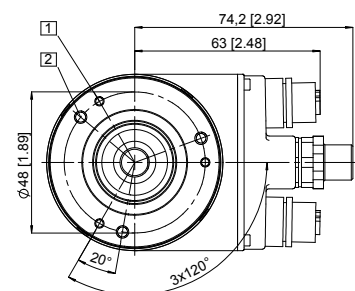
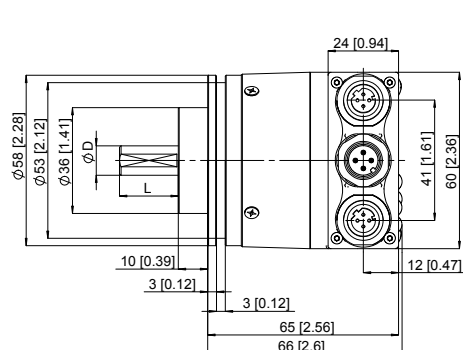


Synchro flange, ø 58 [2.28]

Flange type 2 and 4

- 1 3 x M4, 6 [0.24] deep



D	L	Fit
6 [0.24]	10 [0.39]	h7
10 [0.39]	20 [0.79]	f7
1/4"	7/8"	h7
3/8"	7/8"	h7

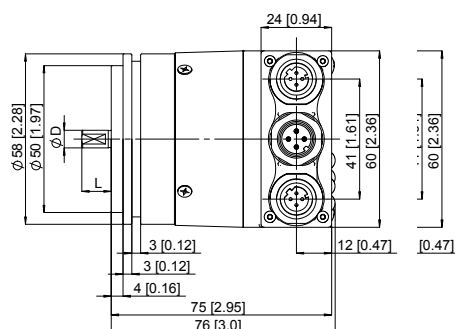

Square flange, □ 63.5 [2.5]

Flange type 5 and 7

D	L	Fit
6 [0.24]	10 [0.39]	h7
10 [0.39]	20 [0.79]	f7
1/4"	7/8"	h7
3/8"	7/8"	h7

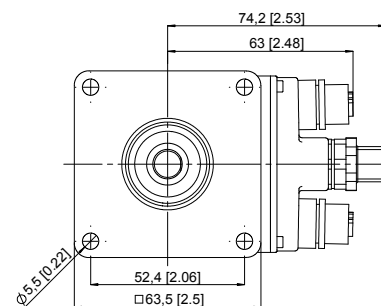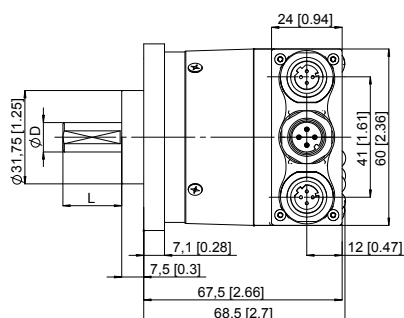

Absolute encoders - singleturn

**Standard
optical**

Sendix 5858 / 5878 (shaft / hollow shaft)



PROFINET IO

Dimensions hollow shaft version (blind hollow shaft), with removable bus terminal cover

Dimensions in mm [inch]



Flange with spring element, long Flange type 1 and 2

- 1 Torque stop slot, recommendation: cylindrical pin DIN 7, $\varnothing 4$ [0.16]
 - 2 3 x M3, 5.5 [0.21] deep
 - 3 Recommended torque for the clamping ring 0.6 Nm
- L: Insertion depth for blind hollow shaft: 30 [1.18]

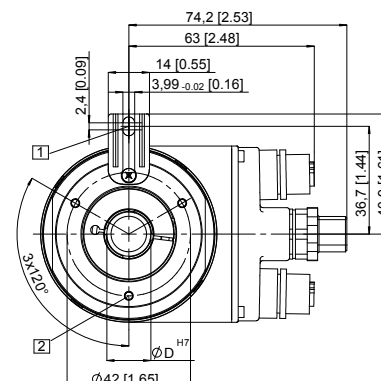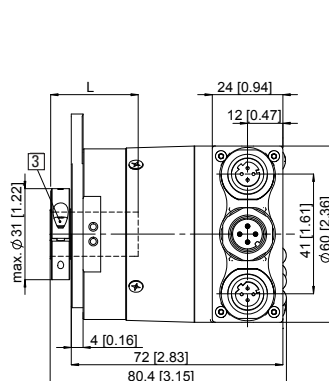

Flange with stator coupling, $\varnothing 63$ [2.48] Flange type 5 and 6

- 1 Fixing screws DIN 912 M3 x 8 (washer included in delivery)
 - 2 Recommended torque for the clamping ring 0.6 Nm
- L: Insertion depth for blind hollow shaft: 30 [1.18]

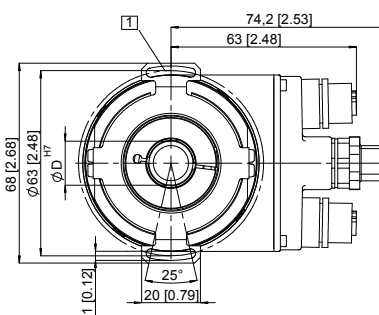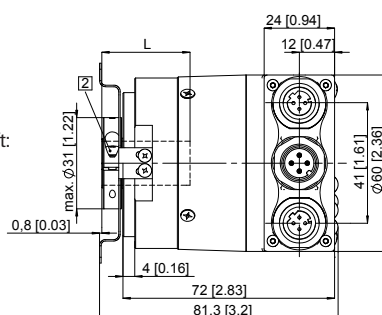

Flange with stator coupling, $\varnothing 65$ [2.56] Flange type 3 and 4

- 1 Recommended torque for the clamping ring 0.6 Nm
- L: Insertion depth for blind hollow shaft: 30 [1.18]

