



Key Features

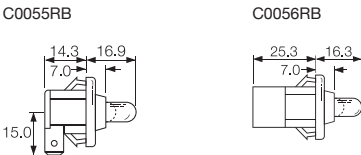
- Ratings up to 0.2A, 250V ac
- High temperature rating up to 125°C
- Long overtravel
- Choice of terminal orientation








Approvals and specifications

0055 & 0056  
0.2(0.2)A 250Vac 25T125 5E4  
(50,000 operations)

μ contact gap

Dimensions and Properties



Terminal	Function	Actuator	Body	Options
<b>C</b>  6.3x0.8	<b>0055</b>  ON - OFF (momentary OFF) 90° terminals		<b>B</b> Panel cut - out  Ø19.05 19.2	<b>Finish</b> Gloss finish only
<b>H</b>  4.8x0.8	<b>0056</b>  ON - OFF (momentary OFF) straight terminals	<b>R</b> 	Panel thickness 0055 1.0 - 1.6 0056 1.0 - 2.6  Flange  Ø24.1 6.6	<b>Colour</b> White or black Call sales for custom colours.