


**Retro-reflective sensors**

**FPDM 16P3921/S14**

**dimension drawing**

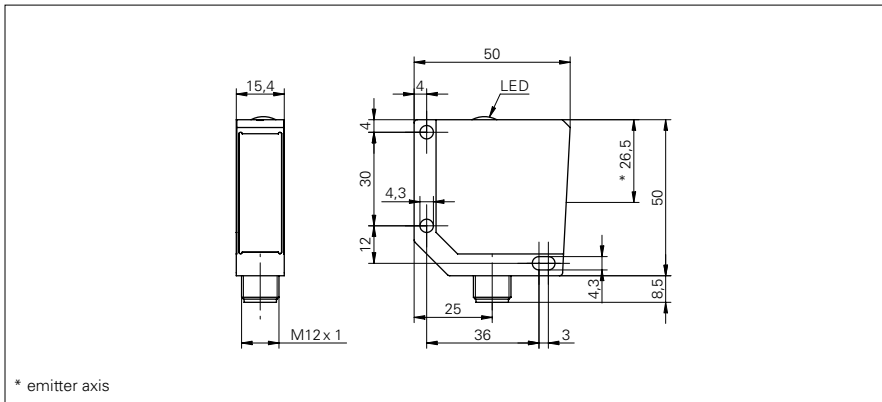

**general data**

type	retro-reflective sensor
version	for transparent objects
light source	pulsed red LED
actual range $S_b$	6 m
nominal range $S_n$	7,2 m
polarization filter	yes
light indicator	LED yellow
sensitivity adjustment	Teach-in
wave length	660 nm

**electrical data**

response time / release time	< 2,5 ms
adaption time	< 25 ms
voltage supply range +Vs	10 ... 30 VDC
current consumption max. (no load)	50 mA
current consumption typ.	40 mA
voltage drop $V_d$	< 1,8 VDC
output function	dark operate
output circuit	PNP
output current	< 200 mA
short circuit protection	yes
reverse polarity protection	yes

**mechanical data**

width / diameter	15,4 mm
height / length	50 mm
depth	50 mm
type	rectangular
housing material	die-cast zinc
front (optics)	PMMA
connection types	connector M12 4 pin

**ambient conditions**

operating temperature	-25 ... +65 °C
protection class	IP 67

**photo**



**connection diagram**

