

**Product Information**

H1Z- / H2Z-008..025GM / K

**Flow Indicator H1Z / H2Z**



- No electrical supply required
- Individually calibrated display
- Compact design

**Characteristics**

A piston fitted with a magnet is pushed through the medium against the force of a spring. This activates the pointer of the measuring device by means of a magnetic coupling. Because of the hermetic separation from the medium, the display unit cannot be soiled by the medium.

**Technical data**

Switch	without	
Nominal width	DN 8..25	
Process connection	female thread G 1/4..G 1 (further process connections available on request)	
Display range	0.1..85 l/min	for details see table "Ranges"
Pressure loss	0.4..3.5 bar at Q <sub>max.</sub>	
Q <sub>max.</sub>	to 100 l/min	
Tolerance	±5 % of full scale value	
Pressure resistance	PN 200 bar optionally PN 500 bar	
Media temperature	-20..+70 °C	
Ambient temperature	-20..+70 °C	
Media	water, oil (gases and aggressive media available on request)	
Electrical data	none	
Materials medium-contact	Brass construction: CW614N nickelled, CW614N, 1.4310, hard ferrite, NBR	Stainless steel construction: 1.4571, 1.4404, 1.4310, hard ferrite PTFE-coated, FKM
Non-medium-contact materials	PC, acrylic	
Weight	see table "Dimensions and weights"	
Installation location	Standard: horizontal inwards flow from the left; other installation positions are possible; the installation position affects the display range.	

**Ranges**

Details in the table correspond to horizontal inwards flow with increasing flow rate.

**Standard type H1Z**

Display range l/min H <sub>2</sub> O	Q <sub>max.</sub> recommended	Pressure loss bar at Q <sub>max.</sub> H <sub>2</sub> O
0.1 - 1.2	6	0.4
0.5 - 6.0	10	0.5
1.0 - 12.0	20	0.6
2.0 - 23.0	30	0.4
3.0 - 34.0	40	
4.0 - 45.0	60	0.8
6.0 - 65.0	80	1.4
20.0 - 85.0	100	1.6

Special ranges are available.


**Viscosity compensated H2Z**

Display range l/min oil	Q <sub>max.</sub> recommended	Pressure loss bar at Q <sub>max.</sub> oil mm <sup>2</sup> /s					Viscosity stability  ±8 %, min.
		30	60	100	205	330	
30..330 mm <sup>2</sup> /s		30	60	100	205	330	
0.5 - 10	12	1.1	1.4	1.6	2.8	3.5	±0.3 l/min
1.5 - 20	22	2.2	2.3	2.4			±0.5 l/min
2.5 - 30	35	1.9	2.0	2.1	2.3	2.9	±0.8 l/min
6.0 - 45	60					2.6	±2.7 l/min
12.0 - 65	80	2.1	2.3	2.4	2.6	2.8	±3.0 l/min

Special ranges are available.

**Dimensions and weights**

	G	Types	SW	X	Weight kg
<b>Brass</b>	G 1/4	H.Z-008GM	40	15	1.4
	G 3/8	H.Z-010GM			1.3
	G 1/2	H.Z-015GM		18	1.2
	G 3/4	H.Z-020GM			1.2
	G 1	H.Z-025GM			1.1
<b>Stainless steel</b>	G 1/4	H.Z-008GK	41	15	1.3
	G 3/8	H.Z-010GK			1.3
	G 1/2	H.Z-015GK		18	1.2
	G 3/4	H.Z-020GK			1.2
	G 1	H.Z-025GK			1.1

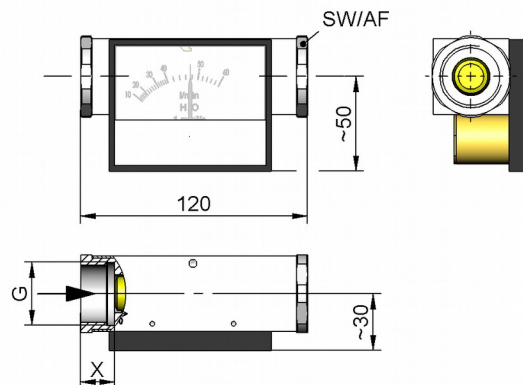

... professional Instruments "MADE IN GERMANY"

**Product Information**

**Handling and Operation**

- Include straight calming section of 5 x DN in inlet and outlet
- If the media are dirty, install a filter  
(use magnetic filter for ferritic components)

**Ordering code**

1. 2. 3. 4. 5. 6.  
 H   **Z** -  **G**

<b>1. Construction</b>		
1	standard	
2	viscosity compensated	
<b>2. Display</b>		
Z	with frontal measurement display Z	
<b>3. Nominal width</b>		
008	DN 8 - G 1/4	
010	DN 10 - G 3/8	
015	DN 15 - G 1/2	
020	DN 20 - G 3/4	
025	DN 25 - G 1	
<b>4. Process connection</b>		
G	female thread	
<b>5. Connection material</b>		
M	brass	
K	stainless steel	
<b>6. H1 - Display range H<sub>2</sub>O for horizontal inwards flow</b>		
001	0.1 - 1.2 l/min	●
005	0.5 - 6.0 l/min	●
010	1.0 - 12.0 l/min	●
020	2.0 - 23.0 l/min	●
030	3.0 - 34.0 l/min	●
040	4.0 - 45.0 l/min	●
060	6.0 - 65.0 l/min	●
080	20.0 - 85.0 l/min	●
<b>H2 - display range oil 30..330 mm<sup>2</sup>/s for horizontal inwards flow</b>		
008	0.5 - 10 l/min	●
015	1.5 - 20 l/min	●
025	2.5 - 30 l/min	●
040	6.0 - 45 l/min	●
060	12.0 - 65 l/min	●

**Options**

- Special ranges/special scaling
- Pressure resistance PN 500
- Temperature display 0..120 °C
- Reinforced piston

**Ordering information**

- Specify direction of flow, medium, and display range.
- For oils. State viscosity, temperature and designation (e.g. ISO VG 68) (enquire about display range).
- For gases, state pressure (relative or absolute), temperature and medium (e.g. air) (request display range)