


# Incremental encoders

**Compact optical**

**Sendix Base KIS40 / KIH40 (shaft / hollow shaft)**

**Push-Pull / RS422 / open collector**

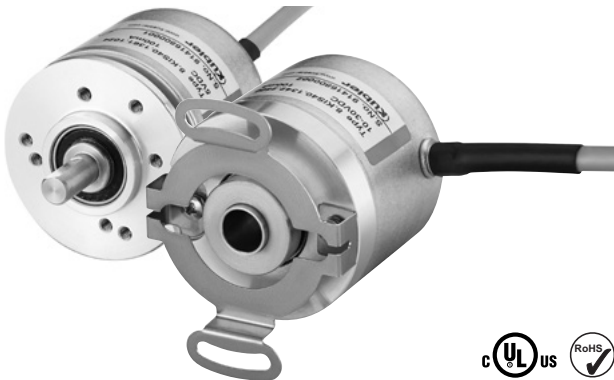

The incremental encoders type Sendix Base KIS40 / KIH40 with optical sensor technology have been designed for highest cost-effectiveness. They are available with a resolution of up to 2500 pulses per revolution.

They are particularly suitable for tight mounting spaces and small machines and appliances.



Safety-Lock™



High rotational speed



Temperature range  
-20°...+70°C



Shock / vibration resistant



Short-circuit proof



Reverse polarity protection



Magnetic field proof



Optical sensor

## Compact and robust

- Only 40 mm outer diameter.
- Ideally suited for use where space is tight.
- Sturdy bearing construction in Safety Lock™ design.
- Safe commissioning: reverse polarity protection and short-circuit proof.

## Flexible

- Maximum resolution of 2500 pulses per revolution.
- Power supply 5 V DC or 10 ... 30 V DC.
- Push-Pull, RS422 or open collector
- Radial or axial cable.

## Order code

### Shaft version

**8.KIS40 . 1XXXX . XXXX**  
Type                      a   b   c   d                      e

#### a Flange

1 = clamping-synchro flange,  $\varnothing$  40 mm [1.57"]

#### b Shaft ( $\varnothing \times L$ )

3 =  $\varnothing$  6 x 12.5 mm [0.24 x 0.49"], with flat  
5 =  $\varnothing$  1/4" x 12.5 mm [1/4" x 0.49"], with flat

#### c Output circuit / power supply

4 = Push-Pull (with inverted signal) / 10 ... 30 V DC  
3 = open collector (with inverted signal) / 10 ... 30 V DC  
6 = RS422 (with inverted signal) / 5 V DC

#### d Type of connection

1 = axial cable, 2 m [6.56'] PVC  
2 = radial cable, 2 m [6.56'] PVC

#### e Pulse rate

25, 100, 200, 360, 500, 512, 600, 1000, 1024, 2000, 2048, 2500  
(e.g. 500 pulses => 0500)

#### Optional on request

- other pulse rates

#### Stock types

8.KIS40.1342.0360	8.KIS40.1362.0500
8.KIS40.1342.0500	8.KIS40.1362.1024
8.KIS40.1342.1000	8.KIS40.1362.2048
8.KIS40.1342.1024	
8.KIS40.1342.2048	
8.KIS40.1342.2500	

## Order code

### Hollow shaft

**8.KIH40 . XXXXX . XXXX**  
Type                      a   b   c   d                      e

#### a Flange

2 = with spring element, long  
5 = with stator coupling,  $\varnothing$  46 mm [1.81"]

#### b Blind hollow shaft

4 =  $\varnothing$  8 mm [0.32"]  
3 =  $\varnothing$  1/4"

#### c Output circuit / power supply

4 = Push-Pull (with inverted signal) / 10 ... 30 V DC  
3 = open collector (with inverted signal) / 10 ... 30 V DC  
6 = RS422 (with inverted signal) / 5 V DC

#### d Type of connection

1 = axial cable, 2 m [6.56'] PVC  
2 = radial cable, 2 m [6.56'] PVC

#### e Pulse rate

25, 100, 200, 360, 500, 512, 600, 1000, 1024, 2000, 2048, 2500  
(e.g. 500 pulses => 0500)

#### Optional on request

- other pulse rates

#### Stock types

8.KIH40.2442.1024	8.KIH40.5442.0360
8.KIH40.2462.1000	8.KIH40.5442.0500
8.KIH40.2462.1024	8.KIH40.5442.1024
	8.KIH40.5442.2048
	8.KIH40.5442.2500
	8.KIH40.5462.0500
	8.KIH40.5462.2048

# Incremental encoders

<b>Compact optical</b>	<b>Sendix Base KIS40 / KIH40 (shaft / hollow shaft)</b>	<b>Push-Pull / RS422 / open collector</b>
------------------------	---	---

Mounting accessory for shaft encoders		Order no.
<b>Coupling</b>	bellows coupling ø 15 mm [0.59"] for shaft 6 mm [0.24"]	<b>8.0000.1202.0606</b>
Connection technology		Order no.
<b>Connector, self-assembly (straight)</b>	M12 female connector with coupling nut	<b>05.CMBS 8181-0</b>

Further accessories can be found in the accessories section or in the accessories area of our website at: [www.kuebler.com/accessories](http://www.kuebler.com/accessories).  
Additional connectors can be found in the connection technology section or in the connection technology area of our website at: [www.kuebler.com/connection\\_technology](http://www.kuebler.com/connection_technology).

## Technical data

Mechanical characteristics		Working temperature range	
<b>Maximum speed</b>	4500 min <sup>-1</sup>	-20°C ... +70° [-4°F ... +158°F]	
<b>Mass moment of inertia</b>	approx. 0.2 x 10 <sup>-6</sup> kgm <sup>2</sup>	<b>Materials</b>	
<b>Starting torque – at 20°C [68°F]</b>	< 0.05 Nm	shaft	stainless steel
<b>Shaft load capacity</b>	radial 40 N axial 20 N	flange	aluminium
		housing	aluminium
<b>Weight</b>	ca. 0.17 kg [6.00 oz]	cable	PVC
<b>Protection acc. to EN 60529</b>	IP64	<b>Shock resistance acc. to EN 60068-2-27</b>	1000 m/s <sup>2</sup> , 6 ms
		<b>Vibration resistance acc. to EN 60068-2-6</b>	100 m/s <sup>2</sup> , 55 ... 2000 Hz

Electrical characteristics			
Output circuit	RS422 (TTL comp.)	Push-Pull <sup>1)</sup> (7272 comp.)	Open collector (7273)
<b>Power supply</b>	5 V DC (±5 %)	10 ... 30 V DC	10 ... 30 V DC
<b>Power consumption with inverted signal (no load)</b>	typ. 40 mA max. 90 mA	typ. 50 mA max. 100 mA	100 mA
<b>Permissible load / channel</b>	max. +/- 20 mA	max. +/- 20 mA	+/- 20 mA sink at 30 V DC
<b>Pulse frequency</b>	max. 250 kHz	max. 250 kHz	max. 250 kHz
<b>Signal level</b>	HIGH min. 2.5 V LOW max. 0.5 V	min. +V - 2.0 V max. 0.5 V	
<b>Rising edge time t<sub>r</sub></b>	max. 200 ns	max. 1 µs	
<b>Falling edge time t<sub>f</sub></b>	max. 200 ns	max. 1 µs	
<b>Short circuit proof outputs <sup>2)</sup></b>	yes <sup>3)</sup>	yes	yes
<b>Reverse polarity protection of the power supply</b>	no	yes	yes
<b>UL approval</b>	file 224618		
<b>CE compliant acc. to</b>	EMC guideline 2014/30/EU RoHS guideline 2011/65/EU		

## Terminal assignment

Output circuit	Type of connection	Cable (isolate unused wires individually before initial start-up)									
3, 4, 6 with inv. signal	1, 2	Signal:	0 V	+V	A	$\bar{A}$	B	$\bar{B}$	0	$\bar{0}$	
		Cable colour:	WH	BN	GN	YE	GY	PK	BU	RD	

- +V: Encoder power supply +V DC
- 0 V: Encoder power supply ground GND (0 V)
- A,  $\bar{A}$ : Incremental output channel A
- B,  $\bar{B}$ : Incremental output channel B
- 0,  $\bar{0}$ : Reference signal

1) Max. recommended cable length 30 m [98.43'].  
2) If power supply correctly applied.  
3) Only one channel allowed to be shorted-out:  
at +V= 5 V DC, short-circuit to channel, 0 V, or +V is permitted.  
at +V= 5 ... 30 V DC, short-circuit to channel or 0 V is permitted.

# Incremental encoders

**Compact optical**

**Sendix Base KIS40 / KIH40 (shaft / hollow shaft)**



**Push-Pull / RS422 / open collector**

## Dimensions shaft version

Dimensions in mm [inch]

### Clamping-synchro flange, $\varnothing 40$ [1.57] Flange type 1

- 1 3 x M3, 4 [0.16] deep
- 2 4 x M3, 4 [0.16] deep

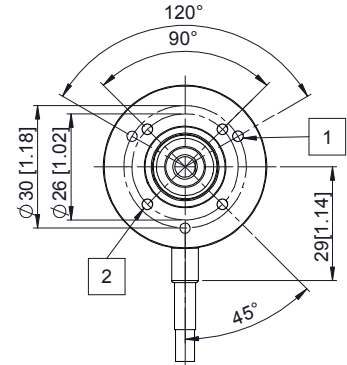
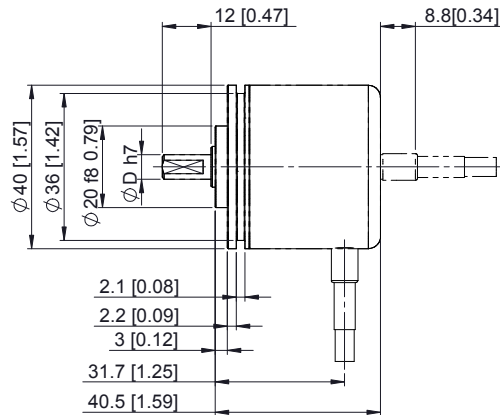


D =  $\varnothing 6$  [0.24]  
 $\varnothing 1/4$ "

## Dimensions hollow shaft version

Dimensions in mm [inch]



### Flange with spring element, long Flange type 2

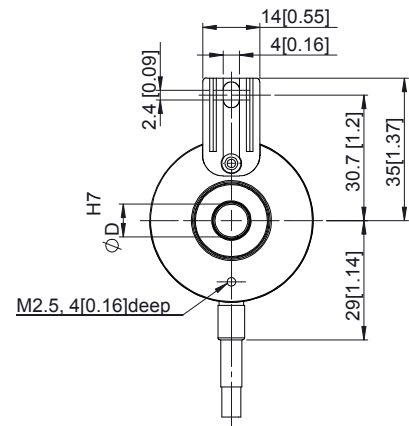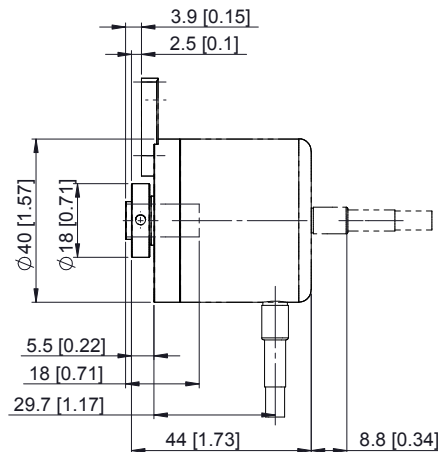

D =  $\varnothing 8$  [0.31]  
 $\varnothing 1/4$ "

### Flange with stator coupling, $\varnothing 46$ [1.81] Flange type 5

Shaft: minimum insertion  
depth 1.5 x D

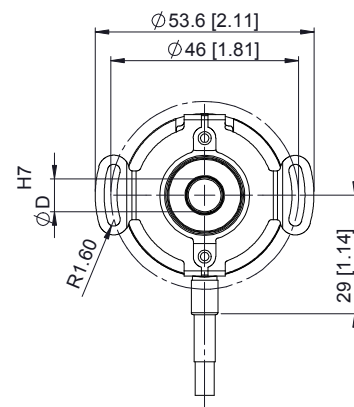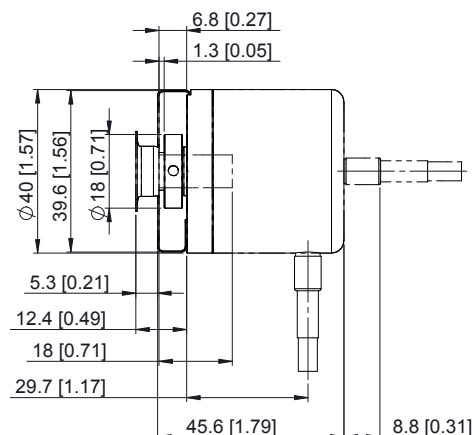

D =  $\varnothing 8$  [0.31]  
 $\varnothing 1/4$ "