


Thermostats


Bimetal thermostats - KSD301h series

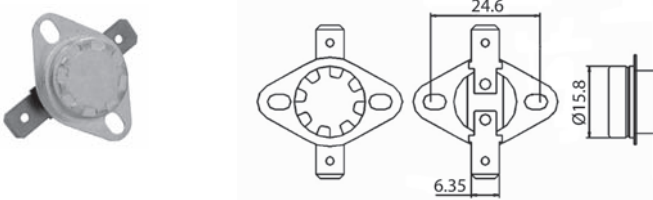

- ✓ NC contacts
- ✓ Max. Voltage 250VAC/10A 125VAC/16A
- ✓ Durability 100000 operations
- ✓ Isolation >100MΩ
- ✓ Temperature range: 25°C~195°C ±3°C

PartNo.	Opening Temp.
TO KSD301-090h	90±3°C
TO KSD301-095h	95±3°C
TO KSD301-100h	100±3°C
TO KSD301-105h	105±3°C
TO KSD301-110h	110±3°C
TO KSD301-115h	115±3°C
TO KSD301-120h	120±3°C


Bimetal thermostats - KSD324h series

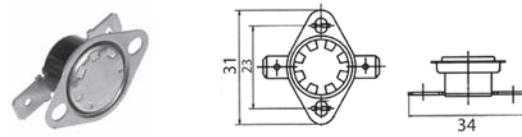

- ✓ NC contacts
- ✓ Max. Voltage 250VAC/10A 125VAC/16A
- ✓ Durability 100000 operations
- ✓ Isolation >100MΩ
- ✓ Temperature range: 25°C~195°C ±3°C

PartNo.	Opening Temp.
TO KSDA324-090h	90±3°C
TO KSDA324-095h	95±3°C
TO KSDA324-100h	100±3°C
TO KSDA324-105h	105±3°C
TO KSDA324-110h	110±3°C
TO KSDA324-115h	115±3°C
TO KSDA324-120h	120±3°C


Bimetal thermostats - KSD301v series

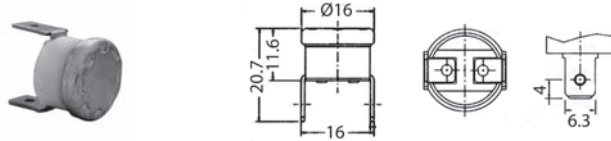

- ✓ NC contacts
- ✓ Max. Voltage 250VAC/10A 125VAC/16A
- ✓ Durability 100000 operations
- ✓ Isolation >100MΩ
- ✓ Temperature range: 25°C~195°C ±3°C

PartNo.	Opening Temp.
TO KSD301-090v	90±3°C
TO KSD301-095v	95±3°C
TO KSD301-100v	100±3°C
TO KSD301-105v	105±3°C
TO KSD301-110v	110±3°C
TO KSD301-115v	115±3°C
TO KSD301-120v	120±3°C


Bimetal thermostats - with reset button

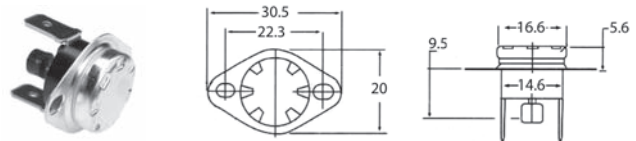

- ✓ NC contacts
- ✓ Max. Voltage 250VAC/10A 125VAC/16A
- ✓ Durability 100000 operations
- ✓ Isolation >100MΩ
- ✓ Temperature range: 25°C~195°C ±3°C

PartNo.	Opening Temp.
TO KSDA313R-090v	90±3°C
TO KSDA313R-095v	95±3°C
TO KSDA313R-100v	100±3°C
TO KSDA313R-105v	105±3°C
TO KSDA313R-110v	110±3°C
TO KSDA313R-115v	115±3°C
TO KSDA313R-120v	120±3°C

Bimetal thermostats - KSD323 series

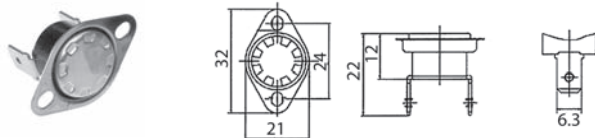

- ✓ NC contacts
- ✓ Max. Voltage 250VAC/10A 125VAC/16A
- ✓ Durability 100000 operations
- ✓ Isolation >100MΩ
- ✓ Temperature range: 25°C~195°C ±3°C

PartNo.	Opening Temp.
TO KSDA323-090v	90±3°C
TO KSDA323-095v	95±3°C
TO KSDA323-100v	100±3°C
TO KSDA323-105v	105±3°C
TO KSDA323-110v	110±3°C
TO KSDA323-115v	115±3°C
TO KSDA323-120v	120±3°C