

# Control Stations Ø 22


## ▶ EMPTY ENCLOSURES

 Technical Info (p. 103)

**1 HOLE** Part Number



LBX0100J

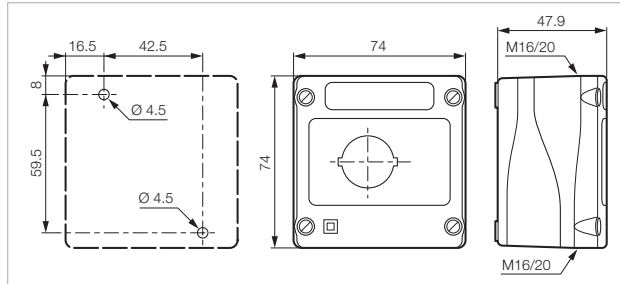

**Black base**

- Grey cover
- Yellow cover
- Yellow cover\*
- Black cover


**LBX0100**  
**LBX0100J**  
**LBX0100JB**  
**LBX0100NR**

\* WITH 'EMERGENCY STOP' TEXT

## 2 HOLES



LBX0200

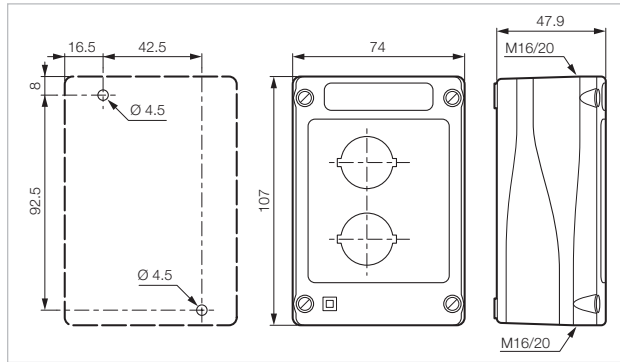

**Black base**


- Grey cover
- Yellow cover

**LBX0200**  
**LBX0200J**

## 3 HOLES



LBX0300

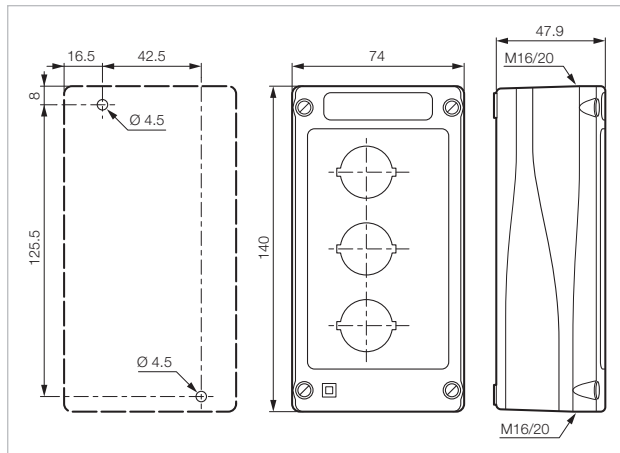

**Black base**

- Grey cover

**LBX0300**

# Control Stations $\varnothing$ 22

## ▶ EMPTY ENCLOSURES


 Technical Info (p. 103)

### 4 HOLES

Part Number



LBX0400

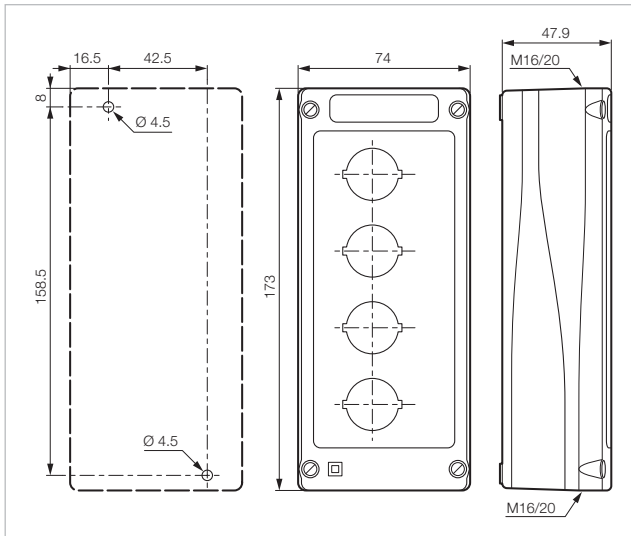

Black base


● Grey cover

LBX0400

### 5 HOLES



LBX0500

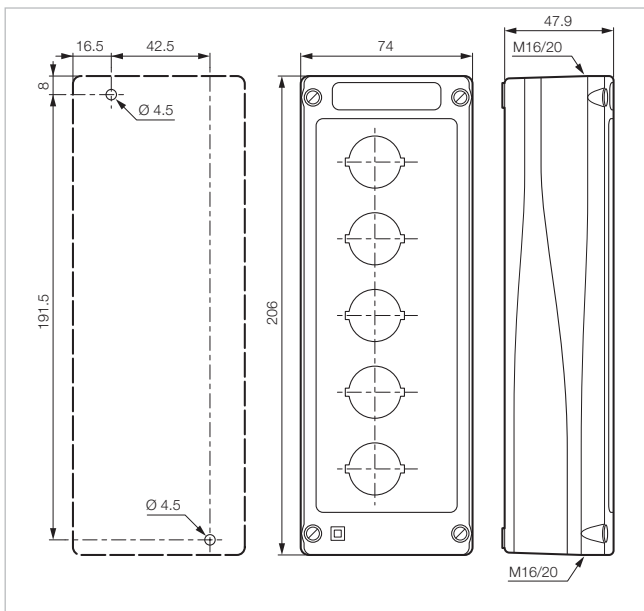

Black base

● Grey cover

LBX0500





### CABLE GLAND FOR LBX ENCLOSURES




M20-BK

	Size	Cable Thickness	
● Black	M20	6mm - 12mm	M20-BK

► SPECIAL REQUEST FORM

MOUNTING NUMBER OF HOLES	CABLE GLAND	COMMENTS
<div style="text-align: center;">circle number of holes</div> <div style="display: flex; justify-content: center; gap: 10px;"> <span>1</span> <span>2</span> <span>3</span> <span>4</span> <span>5</span> </div> <div style="display: flex; justify-content: space-around; margin-top: 10px;"> <div style="text-align: center;">  <p><input type="checkbox"/> Vertical</p> </div> <div style="text-align: center;">  <p><input type="checkbox"/> Horizontal</p> </div> </div>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="text-align: center;"> <input type="checkbox"/> Top    <input type="checkbox"/> Bottom         </div> <div style="text-align: center;"> <input type="checkbox"/> Left    <input type="checkbox"/> Right         </div> </div>	<hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/> <hr/>

DUTY LABEL MARKING <small>(contact us for details)</small>	BLOCKS	SWITCHES	LEGEND PLATES	ENCLOSURE MARKING
---	--------	----------	------------------	----------------------

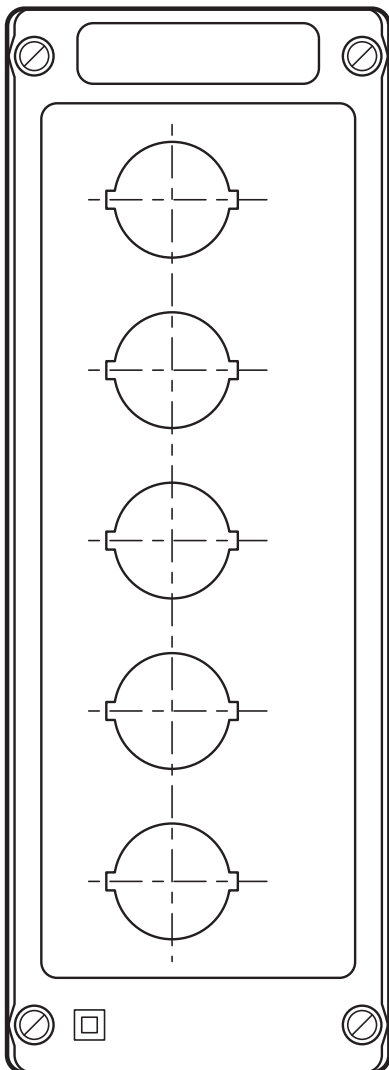

Enter contact block part number in each mounting position. LED modules must be in position 3.

Enter switch part number for each position. For text or symbol on the switch head enter text or symbol code.

Enter legend plate part number for each position. See page 101 for available legend plates. For text or symbol on the legend plate enter text or symbol code.

For silk-screened text or symbol directly on the enclosure enter text or symbol code.

<div style="border: 1px solid black; padding: 2px;">2</div> <div style="border: 1px solid black; padding: 2px;">3</div> <div style="border: 1px solid black; padding: 2px;">1</div>	<div style="border: 1px solid black; padding: 2px;">Switch Part Number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Legend Plate Part number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>
<div style="border: 1px solid black; padding: 2px;">2</div> <div style="border: 1px solid black; padding: 2px;">3</div> <div style="border: 1px solid black; padding: 2px;">1</div>	<div style="border: 1px solid black; padding: 2px;">Switch Part Number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Legend Plate Part number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>
<div style="border: 1px solid black; padding: 2px;">2</div> <div style="border: 1px solid black; padding: 2px;">3</div> <div style="border: 1px solid black; padding: 2px;">1</div>	<div style="border: 1px solid black; padding: 2px;">Switch Part Number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Legend Plate Part number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>
<div style="border: 1px solid black; padding: 2px;">2</div> <div style="border: 1px solid black; padding: 2px;">3</div> <div style="border: 1px solid black; padding: 2px;">1</div>	<div style="border: 1px solid black; padding: 2px;">Switch Part Number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Legend Plate Part number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>
<div style="border: 1px solid black; padding: 2px;">2</div> <div style="border: 1px solid black; padding: 2px;">3</div> <div style="border: 1px solid black; padding: 2px;">1</div>	<div style="border: 1px solid black; padding: 2px;">Switch Part Number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Legend Plate Part number:</div> <div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>	<div style="border: 1px solid black; padding: 2px;">Text or Symbol code:</div>

See pages 80 to 83 for available text and symbol options. For custom text or symbols please contact us.

# Technical Specifications

## ▶ GENERAL

Characteristics	Data	Standards
▶ Storage temperature	- 40 °C to + 70 °C	
▶ Operating temperature	- 25 °C to + 70 °C	
▶ Climatic resistance	Constant humid heat Cyclic damp heat Resistance to sea air	IEC 60068-2-3 IEC 60068-2-30 IEC 60068-2-52
▶ Degree of protection	IP 66 for standard heads IP 67 for shrouded heads IP 66 for equipped control stations IP 20 at the rear of the panel for contact blocks and one piece pilot lights Type 1, 2, 3, 3R, 3S, 4, 4X, 12, and 13 for heads and control stations	IEC 60529    NEMA standard
▶ Protection against mechanical impacts	IK 05 illuminated and non-illuminated heads IK 07 empty control station	IEC 62262
▶ Electrical insulation	Class II - heads and control station	IEC 60947-5-1
▶ Terminal marking		IEC 60947-1
▶ Tightening torques	Locking ring: recommended 3 N.m terminals: max. 1.2 N.m	
▶ Approvals	UL United states and Canada BV Bureau Véritas Certification OC/CB	UL 508, CSA 22.2 Marine rules IEC 60947-5-1 IEC 60947-5-5 IEC 60947-5-4
▶ Vibrations	withstand vibration Fc test: 2 to 25 Hz, 1.6 mm; 25-100 Hz, 4 g	IEC 60068-2-6

# Technical Specifications

## ▶ HEADS

Characteristics	Data	Standards
▶ Mechanical endurance	Spring return: 5,000,000 Push-push: 500,000 Selector switches: 300,000 Mushroom head maintained function EN 418: 10,000 Mushroom head maintained function: 150,000	
▶ Activation force in N	Spring return + NO: 6.5 Spring return + NC: 4.5 Additional NO contact: 4.5 Additional NC contact: 3.0 Push-pull mushroom head + NO + NC: 27 Push-turn mushroom head + NO + NC: 22 Push-pull mushroom head EN 418 + NO + NC: 37 Push-turn mushroom head EN 418 + NO + NC: 60	
▶ Activation force in Nm	Selector switch + NO: 0.04 Additional NO contact: 0.03	

## ▶ EMERGENCY STOP ACTUATORS - EN 418/ISO 13850:

According to IEC/EN60947-5-5, the emergency stop function can be provided by an EN418/ISO13850 mushroom head combined with a "positive opening" NC contact block.

The mechanism of our EN418/ISO13850 mushroom heads is so designed that a "push" action of sufficient force to open the contact systematically triggers an irreversible locking of this opening. This generates an "emergency stop" signal which can be cancelled only by deliberate manual resetting of the mushroom head (pull and turn or unlocking by key).

This function allows to generate an "emergency stop" signal for any equipment subject to directive 98/37CE (machinery safety) completed by the IEC 60204-1 standard.

The EN418/ISO13850 mushroom heads also comply with the safety requirements detailed in standards EN418 and ISO13850.

# Technical Specifications

## ▶ CONTACT BLOCKS

Screw and plug-in connection characteristics	Data	Standards																																						
▶ Rated insulation voltage	690 V AC 600 V AC	IEC/EN 60947-1 UL 508																																						
▶ NC contacts	Positive opening	IEC/EN 60947-5-1																																						
▶ Rated impulse voltage U <sub>imp</sub> Pollution degree	6kV 3																																							
▶ Conventional thermal current in free air conditions	AC15: 10 A DC13: 2.5 A	IEC 60947-5-1																																						
▶ Electrical ratings	<p><b>Alternating current</b> AC15 - A 600 U<sub>e</sub> = 120 V, I<sub>e</sub> = 6 A U<sub>e</sub> = 240 V, I<sub>e</sub> = 3 A U<sub>e</sub> = 380 V, I<sub>e</sub> = 1.9 A U<sub>e</sub> = 480 V, I<sub>e</sub> = 1.5 A U<sub>e</sub> = 500 V, I<sub>e</sub> = 1.4 A U<sub>e</sub> = 600 V, I<sub>e</sub> = 1.2 A</p> <p><b>Minimum operating current</b> - standard blocks U<sub>e</sub> = 24 V DC and I<sub>e</sub> = 5 mA Failure rate &lt; 10<sup>-8</sup></p> <p><b>UL508</b> Alternating Current 50/60Hz - <b>A600</b> Continuous Current - 10 amps Rated Voltage - 600Vac</p> <table border="1"> <thead> <tr> <th rowspan="2">Voltage</th> <th colspan="2">Max. Amps</th> </tr> <tr> <th>Make</th> <th>Break</th> </tr> </thead> <tbody> <tr> <td>72</td> <td>60</td> <td>10</td> </tr> <tr> <td>120</td> <td>60</td> <td>6.0</td> </tr> <tr> <td>240</td> <td>30</td> <td>3.0</td> </tr> <tr> <td>480</td> <td>15</td> <td>1.5</td> </tr> <tr> <td>600</td> <td>12</td> <td>1.2</td> </tr> </tbody> </table>	Voltage	Max. Amps		Make	Break	72	60	10	120	60	6.0	240	30	3.0	480	15	1.5	600	12	1.2	<p><b>Direct current</b> DC13 - Q 600 U<sub>e</sub> = 125 V, I<sub>e</sub> = 0.55 A U<sub>e</sub> = 250 V, I<sub>e</sub> = 0.27 A U<sub>e</sub> = 400 V, I<sub>e</sub> = 0.15 A U<sub>e</sub> = 500 V, I<sub>e</sub> = 0.13 A U<sub>e</sub> = 600 V, I<sub>e</sub> = 0.1 A</p> <p>- gold plated contacts U<sub>e</sub> = 5 V DC and I<sub>e</sub> = 1 mA Failure rate &lt; 10<sup>-8</sup></p> <p><b>Direct Current - Q600</b> Continuous Current - 2.5 amps Rated Voltage - 600Vdc</p> <table border="1"> <thead> <tr> <th rowspan="2">Voltage</th> <th colspan="2">Max. Amps</th> </tr> <tr> <th>Make</th> <th>Break</th> </tr> </thead> <tbody> <tr> <td>24</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>125</td> <td>0.55</td> <td>0.55</td> </tr> <tr> <td>250</td> <td>0.27</td> <td>0.27</td> </tr> <tr> <td>301-600</td> <td>0.10</td> <td>0.10</td> </tr> </tbody> </table>	Voltage	Max. Amps		Make	Break	24	2.5	2.5	125	0.55	0.55	250	0.27	0.27	301-600	0.10	0.10	IEC 60947-5-1
Voltage	Max. Amps																																							
	Make	Break																																						
72	60	10																																						
120	60	6.0																																						
240	30	3.0																																						
480	15	1.5																																						
600	12	1.2																																						
Voltage	Max. Amps																																							
	Make	Break																																						
24	2.5	2.5																																						
125	0.55	0.55																																						
250	0.27	0.27																																						
301-600	0.10	0.10																																						
▶ Electrical operating life	<p><b>1 million cycles for:</b> - AC15 - B 300 U<sub>e</sub> = 120 V, I<sub>e</sub> = 3 A U<sub>e</sub> = 240 V, I<sub>e</sub> = 1.5 A</p> <p>- DC13 - R 300 U<sub>e</sub> = 125 V, I<sub>e</sub> = 0.22 A U<sub>e</sub> = 250 V, I<sub>e</sub> = 0.1 A</p>																																							
▶ Applicable wire sizes	<p>Rigid or flexible wire without ferrule: 0.5 mm<sup>2</sup> to 2 x 2.5 mm<sup>2</sup> Rigid or flexible wire with ferrule: 0.5 mm<sup>2</sup> to 2 x 1.5 mm<sup>2</sup></p>																																							

# Technical Specifications

## ▶ CONTACT BLOCKS

Faston connection	Data	Standards																																																
▶ Rated insulation voltage	320 V AC 300 V AC	IEC/EN60947-1 UL 508																																																
▶ NC contacts	Positive opening	IEC/EN 60947-5-1																																																
▶ Rated impulse withstanding voltage Uimp Pollution degree	6 kV 3																																																	
▶ Conventional thermal current in free air conditions	AC 15: 10 A DC 13: 2.5 A	IEC 60947-5-1																																																
▶ Electrical ratings	<p><b>Alternating current</b> AC15 - A 300 Ue = 120 V, Ie = 6 A Ue = 240 V, Ie = 3 A</p> <p><b>Direct current</b> DC13 - Q 300 Ue = 125 V, Ie = 0.55 A Ue = 250 V, Ie = 0.27 A</p> <p><b>Minimum current of use</b> Ue = 24 V DC and Ie = 5 mA Failure rate &lt; 10<sup>-8</sup></p> <p><b>UL508</b></p> <table border="0"> <tr> <td colspan="3">Alternating Current 50/60Hz - <b>A300</b></td> <td colspan="3">Direct Current - <b>Q300</b></td> </tr> <tr> <td colspan="3">Continuous Current - 10 amps</td> <td colspan="3">Continuous Current - 2.5 amps</td> </tr> <tr> <td colspan="3">Rated Voltage - 300Vac</td> <td colspan="3">Rated Voltage - 300Vdc</td> </tr> <tr> <td></td> <td>Max. Amps</td> <td>Max. Amps</td> <td></td> <td>Max. Amps</td> <td>Max. Amps</td> </tr> <tr> <td>Voltage</td> <td>Make</td> <td>Break</td> <td>Voltage</td> <td>Make</td> <td>Break</td> </tr> <tr> <td>72</td> <td>60</td> <td>10</td> <td>24</td> <td>2.5</td> <td>2.5</td> </tr> <tr> <td>120</td> <td>60</td> <td>6.0</td> <td>125</td> <td>0.55</td> <td>0.55</td> </tr> <tr> <td>240</td> <td>30</td> <td>3.0</td> <td>250</td> <td>0.27</td> <td>0.27</td> </tr> </table>	Alternating Current 50/60Hz - <b>A300</b>			Direct Current - <b>Q300</b>			Continuous Current - 10 amps			Continuous Current - 2.5 amps			Rated Voltage - 300Vac			Rated Voltage - 300Vdc				Max. Amps	Max. Amps		Max. Amps	Max. Amps	Voltage	Make	Break	Voltage	Make	Break	72	60	10	24	2.5	2.5	120	60	6.0	125	0.55	0.55	240	30	3.0	250	0.27	0.27	IEC 60947-5-1
Alternating Current 50/60Hz - <b>A300</b>			Direct Current - <b>Q300</b>																																															
Continuous Current - 10 amps			Continuous Current - 2.5 amps																																															
Rated Voltage - 300Vac			Rated Voltage - 300Vdc																																															
	Max. Amps	Max. Amps		Max. Amps	Max. Amps																																													
Voltage	Make	Break	Voltage	Make	Break																																													
72	60	10	24	2.5	2.5																																													
120	60	6.0	125	0.55	0.55																																													
240	30	3.0	250	0.27	0.27																																													
▶ Electrical operating life	<p><b>1 million cycles for:</b></p> <p>- AC15 - B 300 Ue = 120 V, Ie = 3 A Ue = 240 V, Ie = 1.5 A</p> <p>- DC13 - R 300 Ue = 125 V, Ie = 0.22 A Ue = 250 V, Ie = 0.1 A</p>																																																	
▶ Faston size	6.35 mm (0.25") or 2 x 2.8 mm (0.110")																																																	

# Technical Specifications

## ▶ CONTACT BLOCKS

Pin-style connection (for PCB)	Data	Standards																												
▶ Rated insulation voltage	250 V AC 250 V AC	IEC/EN60947-1 UL 508																												
▶ NC contacts	Positive opening	IEC/EN 60947-5-1																												
▶ Rated impulse withstanding voltage Uimp Pollution degree	4 kV 3																													
▶ Conventional thermal current in free air conditions	AC 15: 5 A DC 13: 1 A	IEC 60947-5-1																												
▶ Electrical ratings	<p><b>Alternating current</b> AC 15 - B 300 Ue = 120 V, Ie = 3 A Ue = 240 V, Ie = 1.5 A</p> <p><b>Direct current</b> DC13 - R 300 Ue = 125 V, Ie = 0.22 A Ue = 250 V, Ie = 0.1 A</p> <p><b>Minimum current of use</b> - standard blocks Ue = 24 V DC and Ie = 5 mA Failure rate &lt; 10<sup>-8</sup></p> <p>- golden contacts Ue = 5 V DC and Ie = 1 mA Failure rate &lt; 10<sup>-8</sup></p> <p><b>UL508</b> Alternating Current 50/60Hz - <b>B300</b> Continuous Current - 5 amps Rated Voltage - 300Vac</p> <p>Direct Current - <b>R300</b> Continuous Current - 1 amp Rated Voltage - 300Vdc</p> <table border="1"> <thead> <tr> <th rowspan="2">Voltage</th> <th colspan="2">Max. Amps</th> <th rowspan="2">Voltage</th> <th colspan="2">Max. Amps</th> </tr> <tr> <th>Make</th> <th>Break</th> <th>Make</th> <th>Break</th> </tr> </thead> <tbody> <tr> <td>72</td> <td>30</td> <td>5.0</td> <td>24</td> <td>1.0</td> <td>1.0</td> </tr> <tr> <td>120</td> <td>30</td> <td>3.0</td> <td>125</td> <td>0.22</td> <td>0.22</td> </tr> <tr> <td>240</td> <td>15</td> <td>1.5</td> <td>250</td> <td>0.11</td> <td>0.11</td> </tr> </tbody> </table>	Voltage	Max. Amps		Voltage	Max. Amps		Make	Break	Make	Break	72	30	5.0	24	1.0	1.0	120	30	3.0	125	0.22	0.22	240	15	1.5	250	0.11	0.11	IEC 60947-5-1 IEC 60947-5-4
Voltage	Max. Amps		Voltage	Max. Amps																										
	Make	Break		Make	Break																									
72	30	5.0	24	1.0	1.0																									
120	30	3.0	125	0.22	0.22																									
240	15	1.5	250	0.11	0.11																									
▶ Electrical operating life	<p><b>1 million cycles for:</b> - AC15 - B 300 Ue = 120 V, Ie = 3 A Ue = 240 V, Ie = 1.5 A</p> <p>- DC13 - R 300 Ue = 125 V, Ie = 0.22 A Ue = 250 V, Ie = 0.1 A</p>																													
▶ Pin diameter	∅ 1 mm																													



# Technical Specifications

## ▶ LED BLOCKS FOR ILLUMINATED HEADS

Characteristics	Data	Standards
▶ Rated insulation voltage	300 V	IEC/EN 60947-5-1
▶ Rated impulse voltage Uimp Pollution degree	4 kV (with filter block see p. 70) 3	IEC/EN 60947-1
▶ Operating voltage	12 to 24 V AC/DC 48 V AC/DC (for LED block) 130 V AC 230 V AC	
▶ Frequency	50 or 60 Hz	
▶ Lifetime at rated supply voltage	Red and yellow: 100 000 hours at 25 °C Other colors: 50 000 hours at 25 °C	
▶ Consumption of LED blocks	Voltage: - 24 V: 25 mA ± 20% - 48 V: 15 mA ± 5% - 130 V: 20 mA ± 10% - 230 V: 16 mA ± 30%	

## ▶ ONE PIECE PILOT LIGHT BA9S


Characteristics	Data	
▶ Rated insulation voltage	400 V	IEC 60947-5-1
▶ Rated impulse withstand voltage Uimp	4 kV	IEC/EN 60947-1
▶ Bulb rating	400 V max. - 2.6 W max. 240 V max. - 2.6 W max.	IEC 60947-5-1 UL 508

# Technical Specifications


## ▶ DIAGRAMS

### PUSH-TO-TEST LED PILOT LIGHT DIAGRAMS


Lamp-testing module with 1 diode (33ET) for direct supply 24 V and 48 V

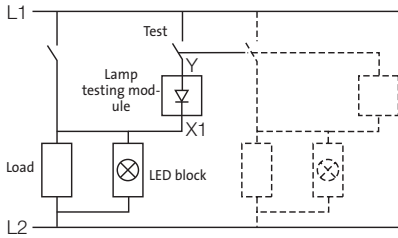


Lamp-testing module with 2 diodes (33ETT) for direct supply 24 V and 48 V

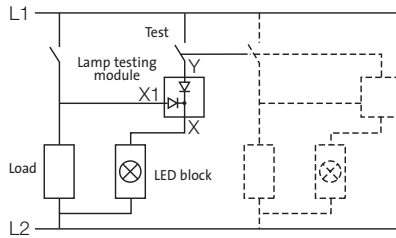


Lamp-testing assembly for direct supply 130 V and 240 V

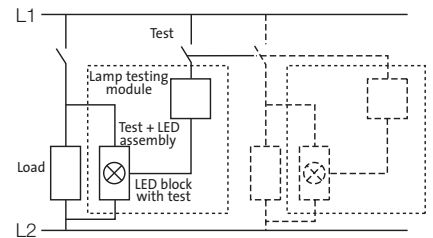


### PRINTED CIRCUIT BOARD MOUNTING

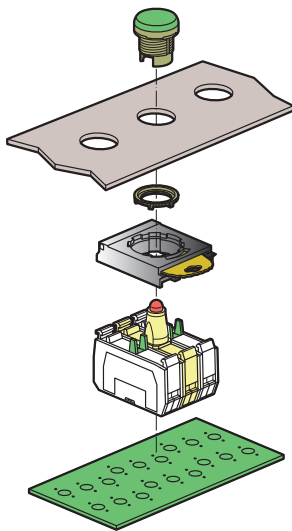

### PCB BOARD DRILL PLAN

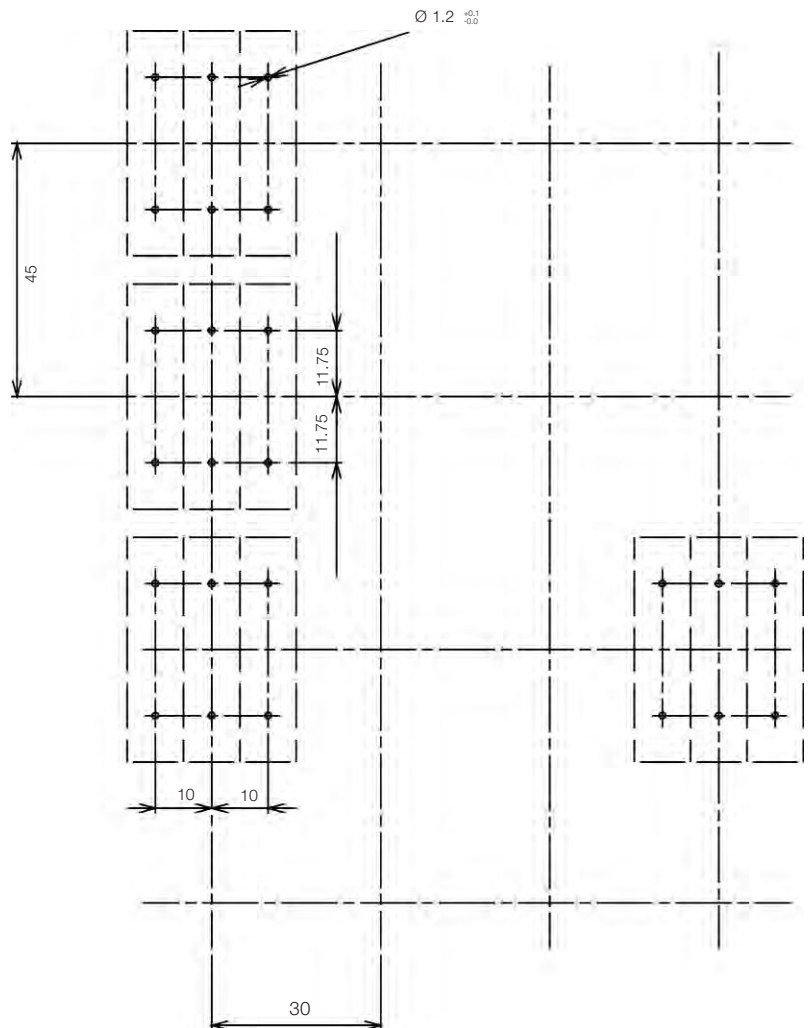

PCB TERMINAL - SINGLE CLIP



PCB TERMINAL - 3 POSITION CLIP

