

MSR131RTP

Description

The MSR131RTP is a versatile monitoring safety relay. It can be connected in four different input wiring configurations: one normally closed, 2 normally closed, 2 PNP connections from a light curtain, or a four-wire safety mat. When connected in the two normally closed fashion, the MSR131RTP checks for cross faults across the two inputs. When connected to light curtains, the light curtain must perform the cross-fault detection.

The MSR131RTP has output monitoring that can accommodate either automatic/manual reset or a monitored manual reset. When configured with automatic/manual reset (jumpers on X1-X2 and X3-X4), the MSR131RTP can have the reset terminals S33-S34 jumpered or can be converted to an unmonitored manual reset by adding a normally open switch in the monitoring loop (S33-S34). When configured to monitored manual reset, the MSR131RTP checks the output monitoring circuit through the manual application of the reset switch.

The outputs include three normally open safety rated outputs, two normally closed auxiliary outputs, and two solid-state outputs. One solid-state output indicates that the inputs are closed. The second solid-state output indicates that the safety outputs are active.

The safety outputs have independent and redundant internal contacts to help ensure the safety function. The auxiliary output is a nonsafety output intended to provide an external signal about the status of the safety outputs.

Features

- Category 4 per EN 954-1
- Stop category 0
- Light curtain, safety mat, E-stop inputs
- Three safety contacts
- Two auxiliary contact
- Two solid-state outputs
- Cross fault monitoring
- Monitored or automatic reset
- Removable terminals

LED Indicators

Green	Power
Green	Start
Green	CH1 Input Closed
Green	CH2 Input Closed
Green	CH1 Output Active
Green	CH2 Output Active

Specifications



Safety Ratings		
Standards	EN 954-1, ISO 13849-1, IEC/EN 60204-1, IEC 60947-4-1, IEC 60947-5-1, ANSI B11.19, AS4024.1	
Safety Classification	Cat. 4 per EN 954-1 (ISO 13849-1), SIL CL3 per EN IEC 62061, PLe per ISO 13849-1	
Functional Safety Data ★ Note: For up-to-date information, visit http://www.ab.com/safety/	PFH _D : < 1.67 x 10 ⁻⁹ MTTF _D : > 389 years Suitable for performance levels PLe (according to ISO 13849-1:2006) and for use in SIL3 systems (according to IEC 62061) depending on the architecture and application characteristics	
Certifications	CE Marked for all applicable directives, cULus, BG, and c-Tick	
Power Supply		
Input Power Entry	24V AC/DC, 115V AC or 230V AC	
Power Consumption	4 W	
Inputs		
Safety Inputs	1 N.C., 2 N.C., LC or SM	
Input Simultaneity	Infinite	
Input Resistance, Max.	45 Ω	
Reset	Auto./Manual or Monitored Manual	
Power On Delay/ Recovery Time	1 second/100 ms	
Response Time	15 ms	
Outputs		
Safety Contacts	3 N.O.	
Auxiliary Contacts	2 N.C.; 1 SS PNP inputs closed; 1 SS PNP outputs active; 30V DC/20 mA solid state	
Thermal Current/ <i>I_{lth}</i>	1 x 6 A or 3 x 5 A nonswitching	
Rated Impulse withstand Voltage	2500V	
Switching Current @ Voltage, Min.	10 mA @ 10V	
Fuses, Output	External 6 A slow blow or 10 A fast acting	
Electrical Life (Operations)	(With surge suppression) 250V AC/6 A/1500VA cosφ = 1...0.1 M 250V AC/2.5 A/625VA cosφ = 1...0.5 M 250V AC/1.5 A/375VA cosφ = 0.35...0.3 M 250V AC/5 A/1250VA cosφ = 0.6...0.1 M 24V DC/2 A/48 W = 1 M 10V DC/0.01 A/0.1 W = 2 M	
Mechanical Life	2,000,000 operations	
Utilization Category		
Resistive: AC-1	6 A/250V AC	
Resistive: DC-1	6 A/24V DC	
Inductive: AC-15	6 A/250V AC	6 A/125V AC
Inductive: DC-13	3 A/24V DC	6 A/24V DC @ 6 ops/min
UL	B300, R300, 1 x 6 A or 2 x 5 A resistive/250V AC, 24V DC	
Environmental and Physical Characteristics		
Enclosure Type Rating/ Terminal Protection	IP40 (NEMA 1)/ IP20	
Operating Temperature [C (F)]	-5...+55 ° (23...131 °)	
Vibration	10...55 Hz, 0.35 mm	
Shock	10 g, 16 ms 100 shocks	
Mounting	45 mm housing, 35 mm DIN Rail	
Weight [g (lb)]	24V DC: 320 (0.71) 115/230V AC: 450 (0.99)	
Conductor Size, Max.	0.2...4 mm ² (24...12 AWG)	

★ Usable for ISO 13849-1:2006 and IEC 62061. Data is based on the following assumptions:
 - Mission time/Proof test interval of 20 years
 - Functional test at least once within six-month period

Product Selection


Inputs	Safety Outputs	Auxiliary Outputs	Terminals	Reset Type	Power Supply	Cat. No.	
1 N.C., 2 N.C., Light Curtain, Safety Mat	3 N.O.	2 N.C., 2 PNP solid state	Removable (Screw)	Auto./Manual or Monitored Manual	24V AC/DC	440R-C23139	
			Removable (Spring Clamp)			440R-C23139S	
			Removable (Screw)		115V AC	440R-C23137	
					230V AC	440R-C23136	

Accessories


Description	Cat. No.
Bag of 4, 4-Pin Screw Terminal Blocks	440R-A23209
Bag of 4, 4-Pin Spring Clamp Terminal Blocks	440R-A23228

Approximate Dimensions


Dimensions are shown in mm (in.). Dimensions are not intended to be used for installation purposes.

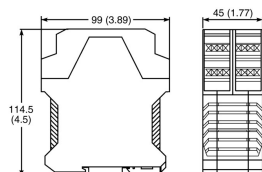


Block Diagram

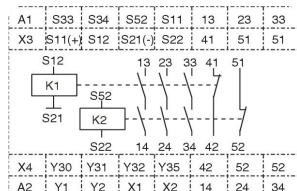


Typical Wiring Diagrams

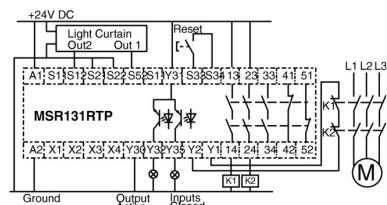


*Light Curtain, Monitored Manual Reset,
Monitored Output*

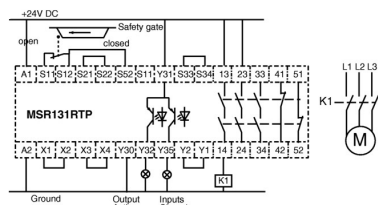


Single Channel Safety Gate, Automatic Reset,
No Output Monitoring

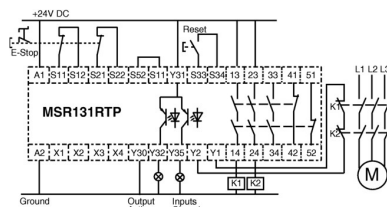


Dual Channel E-Stop, Monitored Manual Reset, Monitored Output

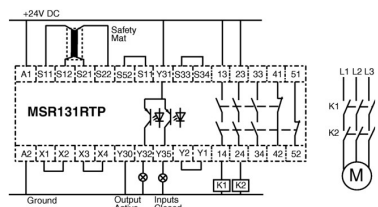

*Safety Mat, Automatic Reset,
No Output Monitoring*

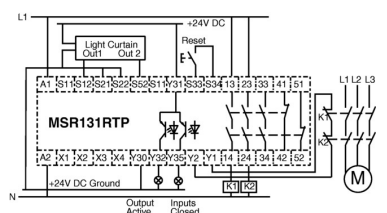

115/230V AC Supply, 24V DC, Light Curtain,
Monitored Manual Reset, Monitored Output

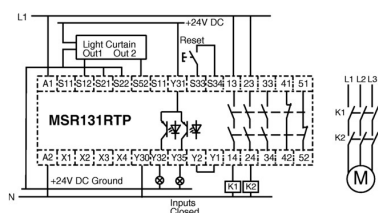

115/230V AC Supply, 24V DC, Light Curtain,
Monitored Manual Reset, No Output Monitoring