嘉尼企業股份有限公司CANAL ELECTRONIC CO.,LTD.





ROCKER SWITCH MODEL:RH SERIES
RATING:(1) 16A 125/250VAC (UL/CUL) △3
(2) 20A 125VAC (UL/CUL)
(3) 16(4)A 250V~T125/55 (VDE/ENEC10/CQC)
DIELECTRIC WITHSTAND VOLTAGE: 1000VAC 1 MINUTE
INSULATION RESISTANCE: 500VDC 100M Ω (MIN)
CONTACT RESISTANCE: 20m Ω INITIAL (MAX.)

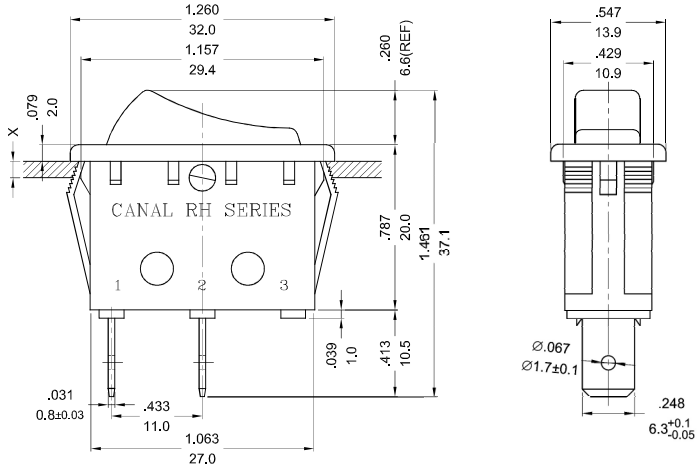

X=panel thickness	Dim.Y	Dim.Z
0.75 ~ 1.25 mm	30.0 +0.1 -0	11.0 +0.1 -0
1.25 ~ 2 mm	30.2 +0.1 -0	11.0 +0.1 -0
2 ~ 3 mm	30.5 +0.1 -0	11.0 +0.1 -0

NOTE: TOLERANCES UNLESS OTHERWISE SPECIFIED:± .012/0.3 (in/mm)

REVISION	DESCRIPTION	REVISED BY
△4 2014.02.06	取消CSA，整理圖面，重新出圖	向 宏
△3 2010.08.25	修正RATING，重新出圖	王發兵
△2 2009.08.26	整理圖面，重新出圖	劉義正
△1 2005.07.14	首次出圖	謝春梅

TOLERANCES					UNIT	mm	PART NAME	RH SPEC DRAWING	DWG NO
DRAWN BY	楊紹才	DESIGNED BY	楊紹才	SCALE	3/2				S0994D
CHECKED BY	2014.02.18 08:53:54 +08'00'	APPROVED BY	2014.02.18 08:53:53 +08'00'	DATE	2005.07.14		PART NO	RH110-C5N-**N-*C	