

Mechanical Differential Pressure Switch S4540

Adjustment ranges from 0.06 ... 0.6 bar up to 0.6 ... 6 bar



Description

The differential pressure switch S4540 can be used in all neutral media, e.g. neutral gases, compressed air, oils etc.

The basis of this differential pressure switch is a membrane element, which is suitable for gauge pressure, vacuum pressure and differential pressure measurements.

With a maximum system pressure of 16 bar the S4540 provides a high overload safety. The switching points can easily be set continuously with the adjusting knob.

Features

- O Long product life
- O High overload safety
- O Easy switching point adjustment
- O RoHS conform

Adjustment ranges

- O Differential pressure 0 ... 6 bar
- O Max. system pressure: 16 bar

Applications

- O Filter and flow control
- O Heating, air conditioning, ventilation technology
- O Building automation
- O Plant and machine construction

Adjustment ranges


| Adjustment ranges (bar) | Max. System Pressure (bar) | Overload Pressure (bar) | Burst Pressure (bar) |
|----------------------------|----------------------------------|-------------------------------|----------------------------|
| 0.06 0.6 | 016 | 16 | 25 |
| 0.10 1.0 | | | |
| 0.16 1.6 | | | |
| 0.25 2.5 | | | |
| 0.40 4.0 | | | |
| 0.60 6.0 | | | |


Model: S4540

Technical Data

| S4540 | |
|---|--|
| Diaphragm | |
| Compressed air, neutral fluids, self-lubricating fluids | |
| Differential pressure | |
| Cable, 1 meter | |
| G1/8 female Compression fittings for 6 mm or 8 mm tube (brass) Compression fittings for 6 mm tube (steel) | |
| NBR Viton [®] Brass Steel | |
| 1 Micro switch NO or NC 10 100 % of f.s., continuously adjustable with adjusting knob approx. 2 % | |
| 5 % of F.S. | |
| max. 0.4 A max. 3.0 A | |
| -20 +80 °C -15 +80 °C -15 +80 °C | |
| IP54 | |
| Mounting foot for wall mounting | |
| ca. 0.8 kg | |
| | |

Dimensions (in mm)

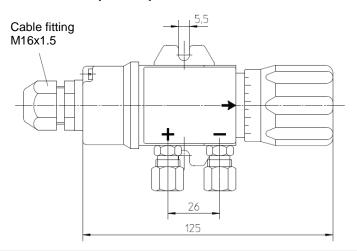



Subject of technical changes