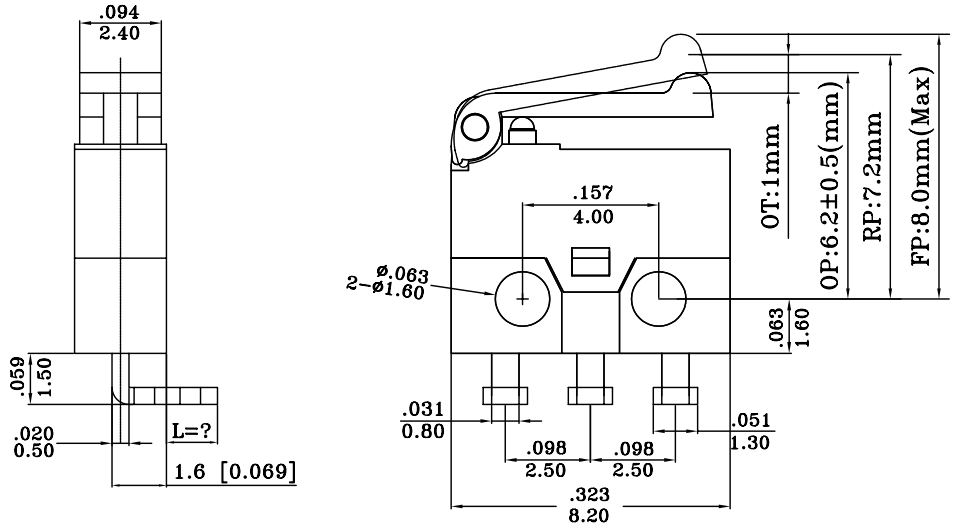

L1=1.5 [0.059]
L2=3.1 [0.122]

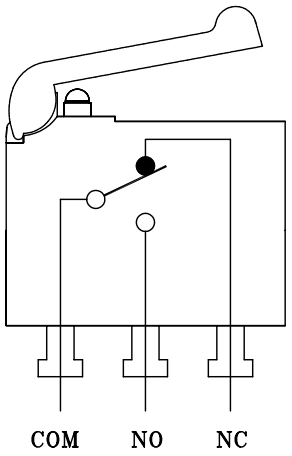

Specification

1.Rating:30VDC 500mA
2.Operating force:50gf(Max)
3.Life:100,000 cycles Min
4.Operating position:6.7mm±0.5mm
5.Contact resistance:100m ohms Max(initial)
6.Insulation resistance:100M ohms Min(at 250VDC)
7.Dielectric withstanding voltage:500VAC 1 minute
8.Operating temperature:-15°C~+70°C
9.Ambient humidity:35%~85%RH
10.Maifunction durability:10 to 55 Hz 1.5mm double amplitude during 2 hours
11.Rest Position:6.0mm (Max)

Material

1.TERMINAL:BRASS SILVER PLATED
2.Body:PBT
3.Cover:POM
4.Level:PBT
5.Pin:POM
6.Connect:BeCu
7.Contact:Silver

嘉尼企業股份有限公司 研發部 2003.10.01 發圖章

修正 REVISION	說明 DESCRIPION	核准 APPROVAL BY	公差 TOLEANCES .X±0.1.XX±0.05	角度 ANGLE ½°	單位 DIMENSION UNIT mm.	版次 VER	A版1次
4			繪圖 DRAWN BY 吳美玉	設計 DESIGNED BY ERIC	比例尺 SCALE 1:1	品名 TITLE SSM Series	圖號 DRAWING NO SSM-001R-L( )
3							材質 MATERIAL
2			核對 CHECKED BY	核准 APPROVED BY	日期 DATE 2003.5.13		處理 FINISH
1 2003.10.01	增加標註						