




# crm+130/D/TC/E

## scale drawing



## detection zone

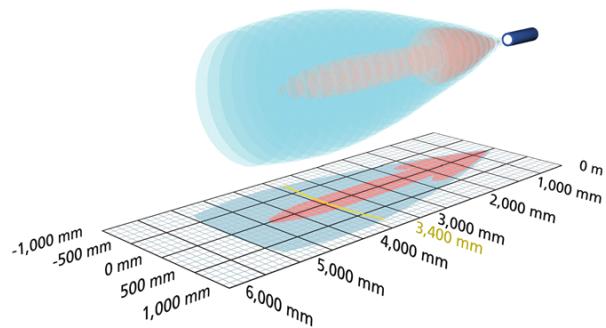

1 x pnp



2,000 mm

operating range	200 - 2.000 mm
design	cylindrical M30
operating mode	proximity switch/reflective mode reflective barrier window mode
particularities	high chemical resistance stainless steel version display

## ultrasonic -specific

means of measurement	echo propagation time measurement
transducer frequency	200 kHz
blind zone	200 mm
operating range	1,300 mm
maximum range	2,000 mm
resolution/sampling rate	0.18 mm
reproducibility	$\pm 0.15 \%$
accuracy	$\pm 1 \%$ (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	$\pm 10 \%$
Leerlaufstromaufnahme	$\leq 80 \text{ mA}$
type of connection	5-pin M12 initiator plug

# crm+130/D/TC/E

## outputs

<b>output 1</b>	switching output pnp: $I_{max} = 200 \text{ mA}$ ( $U_B=2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	110 ms
delay prior to availability	< 300 ms

## inputs

<b>input 1</b>	com input synchronisation input
----------------	------------------------------------

## housing

<b>material</b>	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	coated with PEEK film, PTFE O-ring
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)


## technical features/characteristics

<b>temperature compensation</b>	yes
<b>controls</b>	2 push-buttons + LED display (TouchControl)
<b>scope for settings</b>	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
<b>Synchronisation</b>	yes
<b>multiplex</b>	yes
<b>indicators</b>	3-digit LED display, 2 x three-colour LED
<b>particularities</b>	high chemical resistance stainless steel version display

# crm+130/D/TC/E

[documentation \(download\)](#)

pin assignment

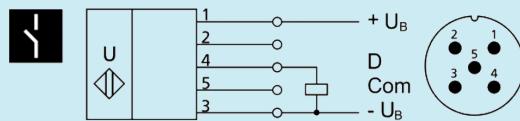

order no.

crm+130/D/TC/E