



# crm+35/D/TC/E

## scale drawing



## detection zone

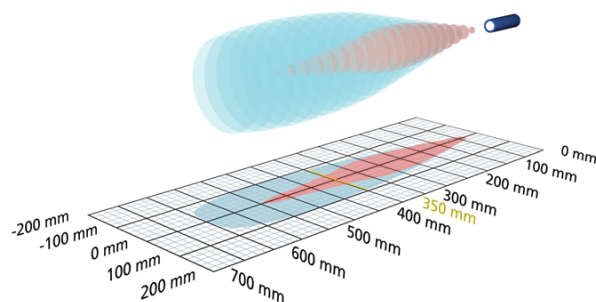

1 x pnp



600 mm

operating range

85 - 600 mm

design

cylindrical M30

operating mode

proximity switch/reflective mode  
reflective barrier  
window mode

particularities

high chemical resistance  
stainless steel version  
display

## ultrasonic -specific

means of measurement

echo propagation time measurement

transducer frequency

360 kHz

blind zone

85 mm

operating range

350 mm

maximum range

600 mm

resolution/sampling rate

0.025 mm

reproducibility

± 0.15 %

accuracy

± 1 % (temperature drift internally compensated)

## electrical data

operating voltage  $U_B$

9 - 30 V d.c., reverse polarity protection

voltage ripple

± 10 %

Leerlaufstromaufnahme

≤ 80 mA

type of connection

5-pin M12 initiator plug

# crm+35/D/TC/E

## outputs

output 1	switching output pnp: $I_{\max} = 200 \text{ mA}$ ( $U_B = 2V$ ) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	5 mm
switching frequency	8 Hz
response time	70 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	coated with PEEK film, PTFE O-ring
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	high chemical resistance stainless steel version display

# crm+35/D/TC/E

[documentation \(download\)](#)

## pin assignment

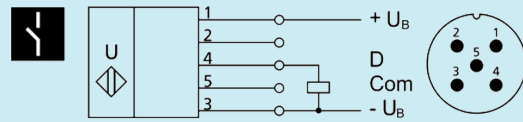

order no.

crm+35/D/TC/E