




crm+35/IU/TC/E

scale drawing



detection zone

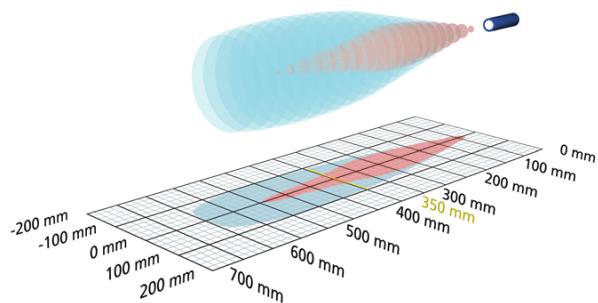

1 x analogue 4-20 mA + 0-10 V



600 mm

operating range

85 - 600 mm

design

cylindrical M30

operating mode

analogue distance measurements

particularities

high chemical resistance
stainless steel version
display

ultrasonic -specific

means of measurement echo propagation time measurement

transducer frequency 360 kHz

blind zone 85 mm

operating range 350 mm

maximum range 600 mm

resolution/sampling rate 0.069 mm to 0.16 mm, depending on the analogue window

reproducibility $\pm 0.15 \%$

accuracy $\pm 1 \%$ (temperature drift internally compensated)

electrical data

operating voltage U_B 9 - 30 V d.c., reverse polarity protection

voltage ripple $\pm 10 \%$

Leerlaufstromaufnahme $\leq 80 \text{ mA}$

type of connection 5-pin M12 initiator plug

crm+35/IU/TC/E

outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
response time	70 ms
delay prior to availability	< 300 ms

inputs

input 1	com input synchronisation input
----------------	------------------------------------

housing

material	stainless steel, plastic parts: PBT, TPU
ultrasonic transducer	coated with PEEK film, PTFE O-ring
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)


technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	high chemical resistance stainless steel version display

crm+35/IU/TC/E

[documentation \(download\)](#)

pin assignment

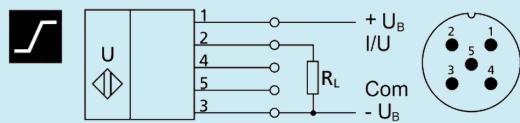

order no.

crm+35/IU/TC/E