



Ics-130/DD/QP

scale drawing



detection zone

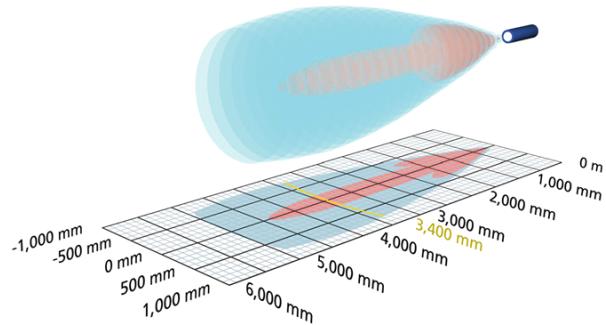

2 x pnp



2,000 mm

operating range

200 - 2.000 mm

design

cuboidal

operating mode

proximity switch/reflective mode
reflective barrier
window mode

particularities

flat housing
lateral sound exit

ultrasonic -specific

means of measurement echo propagation time measurement

transducer frequency 200 kHz

blind zone 200 mm

operating range 1,300 mm

maximum range 2,000 mm

resolution/sampling rate 0.18 mm

reproducibility $\pm 0.15 \%$

accuracy $\pm 1 \%$ (temperature drift internally compensated)

electrical data

operating voltage U_B 9 - 30 V d.c., reverse polarity protection

voltage ripple $\pm 10 \%$

Leerlaufstromaufnahme $\leq 70 \text{ mA}$

type of connection 5-pin M12 initiator plug

lcs-130/DD/QP

outputs

output 1	switching output pnp: $I_{max} = 200 \text{ mA}$ ($U_B=2V$) NOC/NCC adjustable, short-circuit-proof
output 2	switching output pnp: $I_{max} = 200 \text{ mA}$ ($U_B=2V$) NOC/NCC adjustable, short-circuit-proof
switching hysteresis	20 mm
switching frequency	6 Hz
response time	110 ms
delay prior to availability	< 300 ms

inputs

input 1	com input teach-in input
---------	-----------------------------

housing

material	PBT
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 65
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	200 g


technical features/characteristics

temperature compensation	yes
controls	com input control input
scope for settings	Teach-in via com input on pin 5 LCA-2 with LinkControl
Synchronisation	yes
multiplex	no
indicators	2 x three-colour LED
particularities	flat housing lateral sound exit

lcs-130/DD/QP

[documentation \(download\)](#)

pin assignment

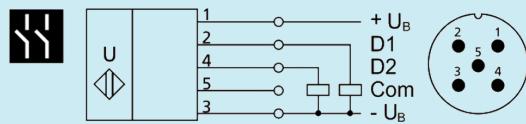

order no.

lcs-130/DD/QP