



mic-130/IU/M

scale drawing



detection zone

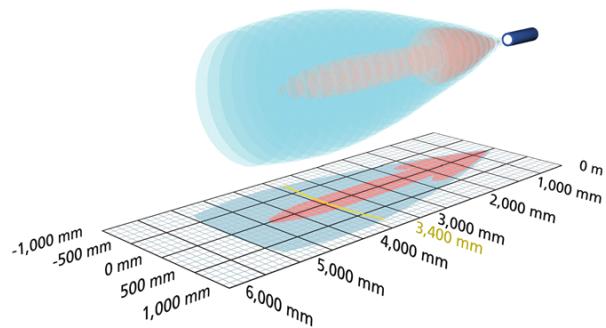

1 x analogue 4-20 mA + 0-10 V



2,000 mm

operating range

200 - 2,000 mm

design

cylindrical M30

operating mode

analogue distance measurements

particularities

metal plug for harsh operational conditions

ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 200 kHz

blind zone 200 mm

operating range 1,300 mm

maximum range 2,000 mm

resolution/sampling rate 0.18 mm to 0.57 mm, depending on the analogue window

reproducibility $\pm 0.15\%$

accuracy $\pm 1\%$ (temperature drift internally compensated)

electrical data

operating voltage U_B 9 - 30 V d.c., reverse polarity protection

voltage ripple $\pm 10\%$

Leerlaufstromaufnahme $\leq 55\text{ mA}$

type of connection 5-pin M12 initiator plug

mic-130/IU/M

outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
response time	110 ms
delay prior to availability	< 440 ms

inputs

input 1	com input teach-in input
----------------	-----------------------------

housing

material	brass sleeve, nickel-plated, plastic parts, PBT
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	140 g
further versions	cable connection (on request)


technical features/characteristics

temperature compensation	yes
controls	com input control input
scope for settings	Teach-in via com input on pin 5 LCA-2 with LinkControl
Synchronisation	yes
multiplex	no
indicators	no
particularities	metal plug for harsh operational conditions

mic-130/IU/M

[documentation \(download\)](#)

pin assignment

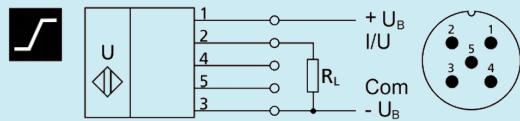

order no.

mic-130/IU/M