



# mic+25/EE/TC

## scale drawing



## detection zone

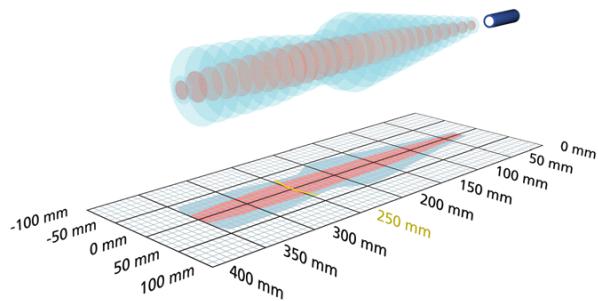

2 x npn



350 mm

operating range

30 - 350 mm

design

cylindrical M30

operating mode

proximity switch/reflective mode  
reflective barrier  
window mode

particularities

display

## ultrasonic -specific

means of measurement	echo propagation time measurement
transducer frequency	320 kHz
blind zone	30 mm
operating range	250 mm
maximum range	350 mm
resolution/sampling rate	0.025 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

## electrical data

operating voltage $U_B$	9 - 30 V d.c., reverse polarity protection
voltage ripple	± 10 %
Leerlaufstromaufnahme	≤ 80 mA
type of connection	5-pin M12 initiator plug

# mic+25/EE/TC

## outputs

output 1	switching output npn: $I_{max} = 200 \text{ mA } (-U_B + 2V)$ NOC/NCC adjustable, short-circuit-proof
output 2	switching output npn: $I_{max} = 200 \text{ mA } (-U_B + 2V)$ NOC/NCC adjustable, short-circuit-proof
switching hysteresis	3 mm
switching frequency	25 Hz
response time	32 ms
delay prior to availability	< 300 ms

## inputs

input 1	com input synchronisation input
---------	------------------------------------

## housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	cable connection (on request)


## technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display

# mic+25/EE/TC

[documentation \(download\)](#)

pin assignment

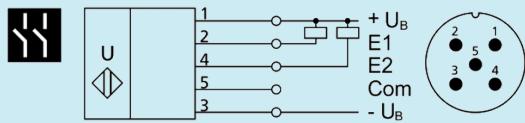

order no.

mic+25/EE/TC