




mic+35/IU/TC

scale drawing



detection zone

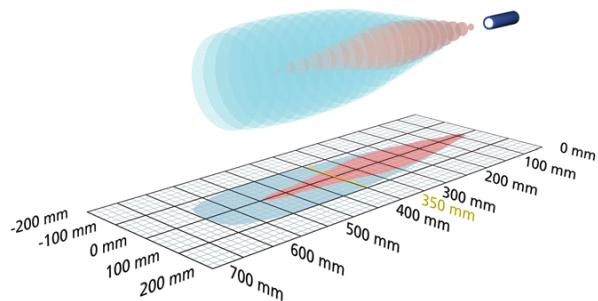

1 x analogue 4-20 mA + 0-10 V



600 mm

operating range

65 - 600 mm

design

cylindrical M30

operating mode

analogue distance measurements

particularities

display

ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 400 kHz

blind zone 65 mm

operating range 350 mm

maximum range 600 mm

resolution/sampling rate 0.025 mm to 0.10 mm, depending on the analogue window

reproducibility $\pm 0.15 \%$

accuracy $\pm 1 \%$ (temperature drift internally compensated)

electrical data

operating voltage U_B 9 - 30 V d.c., reverse polarity protection

voltage ripple $\pm 10 \%$

Leerlaufstromaufnahme $\leq 80 \text{ mA}$

type of connection 5-pin M12 initiator plug

mic+35/IU/TC

outputs

output 1	analogue output current: 4-20 mA / voltage: 0-10 V (at $U_B \geq 15$ V), short-circuit-proof switchable rising/falling
response time	70 ms
delay prior to availability	< 300 ms

inputs

input 1	com input synchronisation input
----------------	------------------------------------

housing

material	brass sleeve, nickel-plated, plastic parts, PBT, TPU
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	110 g
further versions	stainless steel cable connection (on request)
further versions	mic+35/IU/TC/E


technical features/characteristics

temperature compensation	yes
controls	2 push-buttons + LED display (TouchControl)
scope for settings	Teach-in and numeric configuration via TouchControl LCA-2 with LinkControl
Synchronisation	yes
multiplex	yes
indicators	3-digit LED display, 2 x three-colour LED
particularities	display

mic+35/IU/TC

[documentation \(download\)](#)

pin assignment

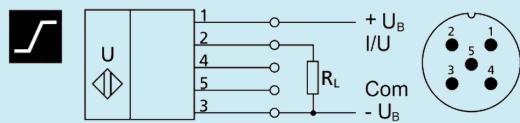

order no.

mic+35/IU/TC