



nano-15/CI

scale drawing

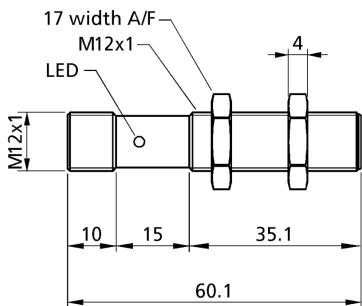

detection zone

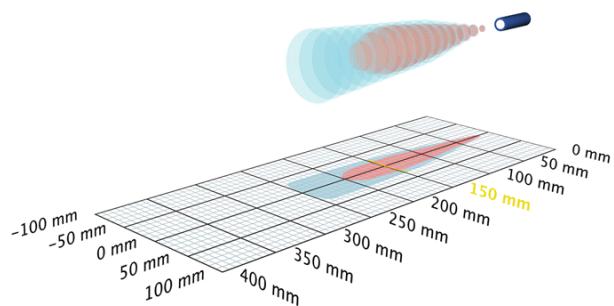

1 x analogue 4-20 mA



250 mm

operating range

20 - 250 mm

design

cylindrical M12

operating mode

analogue distance measurements

particularities

narrow sound field

ultrasonic-specific

means of measurement echo propagation time measurement

transducer frequency 380 kHz

blind zone 20 mm

operating range 150 mm

maximum range 250 mm

reproducibility $\pm 0.15 \%$

accuracy $\pm 1 \%$ (temperature drift internally compensated)

electrical data

operating voltage U_B 10 - 30 V d.c., reverse polarity protection

voltage ripple $\pm 10 \%$

Leerlaufstromaufnahme $\leq 25 \text{ mA}$

type of connection 4-pin M12 initiator plug

nano-15/CI

outputs

output 1	analogue output current: 4-20 mA switchable rising/falling
-----------------	--

response time	24 ms
----------------------	-------

delay prior to availability	< 300 ms
------------------------------------	----------

inputs

input 1	Teach-in input
----------------	----------------

housing

material	brass sleeve, nickel-plated, plastic parts, PBT
-----------------	---

ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
------------------------------	--

class of protection to EN 60529	IP 67
--	-------

operating temperature	-25°C to +70°C
------------------------------	----------------

storage temperature	-40°C to +85°C
----------------------------	----------------

weight	15 g
---------------	------

technical features/characteristics


scope for settings	Teach-in Teach-in über Com-Eingang an Pin 2
---------------------------	--

indicators	1 x LED green: working, 1 x LED yellow: object in the window
-------------------	--

particularities	narrow sound field
------------------------	--------------------

documentation (download)

pin assignment

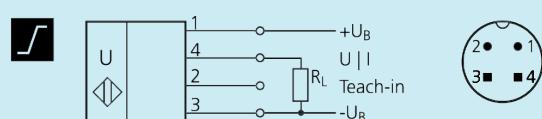

order no.

nano-15/CI