



sks-15/CI

scale drawing



detection zone

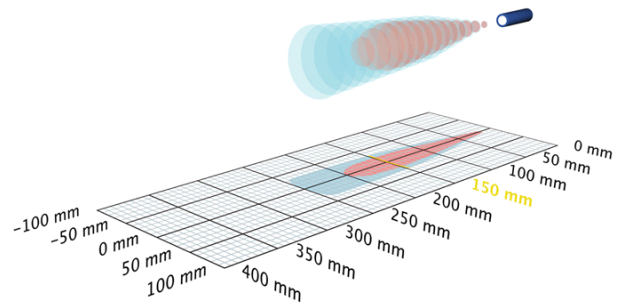

1 x analogue 4-20 mA



250 mm

operating range	20 - 250 mm
design	cuboidal
operating mode	analogue distance measurements
particularities	minimum cuboidal design narrow sound field

ultrasonic -specific

means of measurement	echo propagation time measurement
transducer frequency	380 kHz
blind zone	20 mm
operating range	150 mm
maximum range	250 mm
resolution/sampling rate	0.10 mm
reproducibility	± 0.15 %
accuracy	± 1 % (temperature drift internally compensated)

electrical data

operating voltage U_b	15 V bis 30 V DC, verpolfest
voltage ripple	± 10 %
Leerlaufstromaufnahme	≤ 25 mA
type of connection	4-pin M8 initiator plug

sks-15/CI

outputs

output 1	analogue output current: 4-20 mA switchable rising/falling
response time	24 ms
delay prior to availability	< 300 ms

inputs

input 1	com input
---------	-----------

housing


material	ABS
ultrasonic transducer	polyurethane foam, epoxy resin with glass contents
class of protection to EN 60529	IP 67
operating temperature	-25°C to +70°C
storage temperature	-40°C to +85°C
weight	8 g

technical features/characteristics

temperature compensation	yes
controls	1 push-button
scope for settings	Teach-in via push-button
Synchronisation	ja, über externen Taktgenerator
multiplex	no
indicators	1 x LED green: working, 1 x LED yellow: switch status
particularities	minimum cuboidal design narrow sound field

documentation (download)

pin assignment



order no.

sks-15/CI