




# wms-35/RT

## scale drawing



## detection zone

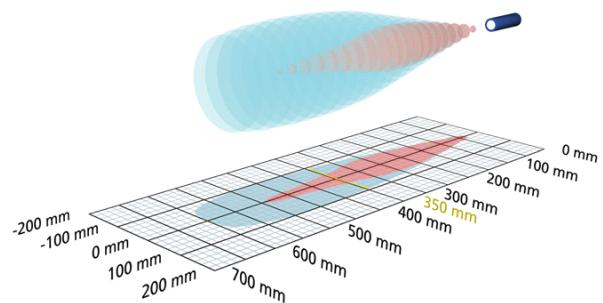

echo output



600 mm

operating range

65 - 600 mm

design

cylindrical M30

operating mode

sensor for evaluators

## ultrasonic -specific

|                      |                                   |
|----------------------|-----------------------------------|
| means of measurement | echo propagation time measurement |
| transducer frequency | 400 kHz                           |
| blind zone           | 65 mm                             |
| operating range      | 350 mm                            |
| maximum range        | 600 mm                            |
| reproducibility      | ± 0.15 %                          |
| accuracy             | temperature drift 0.17 %/K        |

## electrical data

|                         |  |
|-------------------------|--|
| operating voltage $U_B$ | 9 - 30 V d.c., reverse polarity protection |
| voltage ripple          | ± 10 %                                     |
| Leerlaufstromaufnahme   | ≤ 30 mA                                    |
| type of connection      | 4-pin M12 initiator plug                   |

# wms-35/RT

## outputs

|          |   |
|----------|---|
| output 1 | signal output echo<br>pnp: $I_{max} = 10 \text{ mA}$ (signal output echo) |
|----------|---|

## inputs

|                                      |  |
|--------------------------------------|--|
| recommended transmitted pulse length | 80 $\mu\text{s}$   |
| recommended measuring cycle time     | 12 ms  |
| description                          | controlled by open collector (npn), $I_C \geq 3 \text{ mA}$ , $U_{CE} \geq 30 \text{ V}$ |
| input 1                              | signal input - transmitter   |

## housing


|                                 |  |
|---------------------------------|--|
| material                        | brass sleeve, nickel-plated, plastic parts, PBT                              |
| ultrasonic transducer           | polyurethane foam, epoxy resin with glass contents                           |
| class of protection to EN 60529 | IP 65  |
| operating temperature           | -25°C to +70°C   |
| storage temperature             | -40°C to +85°C   |
| weight                          | 140 g  |
| further versions                | stainless steel<br>high chemical resistance<br>cable connection (on request) |

## technical features/characteristics

|                    |     |
|--------------------|-----|
| controls           | no  |
| scope for settings | no  |
| Synchronisation    | yes |
| multiplex          | yes |
| indicators         | no  |

## documentation (download)

### pin assignment

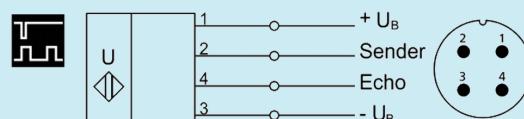

order no.

wms-35/RT