



<b>Identification</b>	Type	WNAA 6-0510
	Part-No.	750510

**Input**

	<b>0/10 V</b>	<b>0–20 mA</b>	<b>4–20 mA</b>
Input resistance	330 k $\Omega$	100 $\Omega$	100 $\Omega$
Input signal	0–10 V, 0–20 mA, 4–10 mA, adjustable via switch		
Galvanic insulation I/O	3-way isolation		
Zero /Span	Production comparison		
Transmission frequency	30 Hz at 3 dB		

**Load Side**

	<b>0/10 V</b>	<b>0–20 mA</b>	<b>4–20 mA</b>
Max. load impedance at I-output		400 $\Omega$	400 $\Omega$
Max. load impedance at U-output	>1 k $\Omega$		
Load impedance	55 $\Omega$		
Output current	max. 21 mA		
Output signal	Adjustable via switch		
Ripple	<5 mV <sub>eff</sub>		

02.04.2016 – Subject to technical modification

Part-No. 750510

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
 www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
 www.lutze.com • sales.gb@lutze.co.uk




SYSTEMATIC TECHNOLOGY

## General

Nominal voltage	AC/DC 24–240 V
Operation voltage range	DC: 16.8–264 V, AC: 19.2–264 V
Rated current	12.0 mA
Status Indication	LED yellow
Input/output protection	AC/DC 30 V overvoltage, current input with PTC, short circuit-proof output
Accuracy	0.1 % FSR (23 °C)
Linearity error	0.02 %
Rise time (10 - 90%)	10 ms
Build-up time (Accuracy 1%)	30 ms
Transmission frequency	<30 Hz
Temperature coefficient	<150 ppm / K FSR
Insulation voltage input/output	4.0 kV <sub>eff</sub>
Housing material	PPE
Field installation	rail TS 35 (EN 50022)
Protection class	IP 20
Installation position	Optional
Termination	Screw terminal: 0.14–1.5 mm <sup>2</sup>
Operation temperature range	-25 °C – 60 °C
Storage temperature range	-40 °C – 85 °C
Dimensions (w × h × d)	17.5 × 79.0 × 84.0 mm
Weight (kg/piece)	0.070 kg/piece
Approvals	cULus, Class I, Div. 2, Groups A, B, C, D T4A

## Dimensions

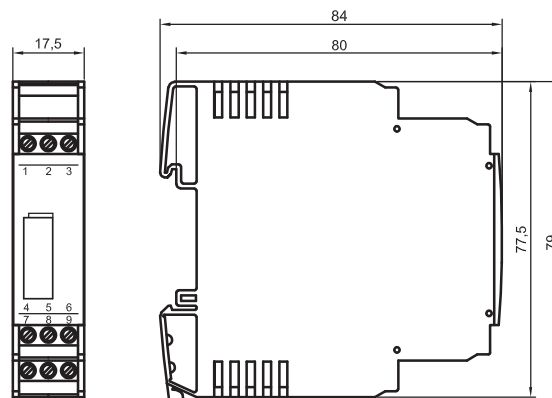

02.04.2016 – Subject to technical modification

Part-No. 750510

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA

Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223

www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park

Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU

Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2


www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY

# Technical data sheet • Interface Technology

## PIN assignment

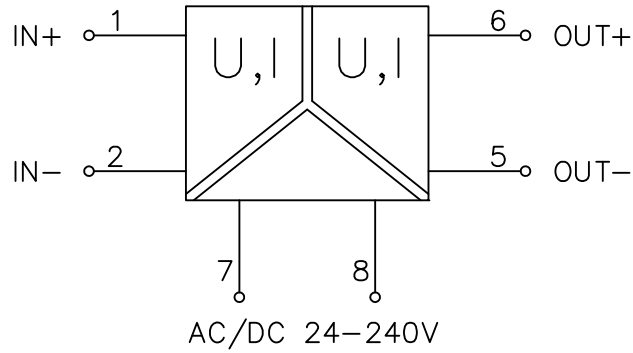

## Range adjustment

S1		
Input	Output	Pos.
0 - 20mA	0 - 10V	0
0 - 20mA	0 - 20mA	1
0 - 20mA	4 - 20mA	2
4 - 20mA	0 - 10V	3
4 - 20mA	0 - 20mA	4
4 - 20mA	4 - 20mA	5
0 - 10V	0 - 10V	6
0 - 10V	0 - 20mA	7
0 - 10V	4 - 20mA	8

## Accessories

Accessories	Color	Article number	Type	PU
Tag holder 7×20 mm	white	760968	BZT-0720	100
Laser printer label 6.35×15.24 mm (sheet with 528 labels)		681033	LEB-0615	1

02.04.2016 – Subject to technical modification

Part-No. 750510

USA: LUTZE INC.

13330 South Ridge Drive • Charlotte, NC 28273, USA  
 Tel. +1 (704) 504-0222 • Fax +1 (704) 504-0223  
 www.lutze.com • info@lutze.com

United Kingdom: LUTZE Ltd.

Unit 3, Sandy Hill Park  
 Sandy Way, Amington • GB-Tamworth, Staffs B77 4DU  
 Tel. +44 (0)1827 31333-0 • Fax +44 (0)1827 31333-2  
 www.lutze.com • sales.gb@lutze.co.uk



SYSTEMATIC TECHNOLOGY